



Cisco Catalyst Switch Guide

Scalable, intelligent LAN switching for campus, branch,
and data center networks of all sizes



Corporate Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA

www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 526-4100

European Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands

www.europe.cisco.com
Tel: 31 0 20 357 1000
Fax: 31 0 20 357 1100

Americas Headquarters

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA

www.cisco.com
Tel: 408 526-7660
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912

www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Cisco Systems has more than 200 offices in the following countries and regions. Addresses, phone numbers, and fax numbers are listed on the
Cisco.com Website at www.cisco.com/go/offices.

Argentina • Australia • Austria • Belgium • Brazil • Bulgaria • Canada • Chile • China PRC • Colombia • Costa Rica • Croatia • Cyprus • Czech Republic
Denmark • Dubai, UAE • Finland • France • Germany • Greece • Hong Kong SAR • Hungary • India • Indonesia • Ireland • Israel • Italy
Japan • Korea • Luxembourg • Malaysia • Mexico • The Netherlands • New Zealand • Norway • Peru • Philippines • Poland • Portugal
Puerto Rico • Romania • Russia • Saudi Arabia • Scotland • Singapore • Slovakia • Slovenia • South Africa • Spain • Sweden
Switzerland • Taiwan • Thailand • Turkey • Ukraine • United Kingdom • United States • Venezuela • Vietnam • Zimbabwe

Copyright © 2005 Cisco Systems, Inc. All rights reserved. CCSP, CCVP, the Cisco Square Bridge logo, Follow Me Browsing, and StackWise are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn, and iQuick Study are service marks of Cisco Systems, Inc.; and Access Registrar, Aironet, ASIST, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Empowering the Internet Generation, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, FormShare, GigaDrive, GigaStack, HomeLink, Internet Quotient, IOS, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, LightStream, Linksys, MeetingPlace, MGX, the Networkers logo, Networking Academy, Network Registrar, Packet, PIX, Post-Routing, Pre-Routing, ProConnect, RateMUX, ScriptShare, ScriptShare, SlideCast, SMARTnet, StrataView Plus, TeleRouter, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries. All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0502R)

Cisco® Catalyst® 6500 and Catalyst 4500 Series Modular Switches

Cisco Catalyst 4900, Catalyst 3750, Catalyst 3560, Catalyst 2960,
Catalyst 2950, Catalyst 2940, and Catalyst Express 500 Series
Fixed-Configuration Switches

Cisco Catalyst Switches

Scalable, intelligent LAN switching for campus, branch, and data center networks of all sizes.

This is your guide to Cisco® Catalyst® switches, the industry's most advanced and versatile portfolio of modular and fixed-configuration LAN switches.

Individually, these switches offer the performance and features required for virtually any deployment, from small workgroups and wiring closets to corporate data centers and network cores. Collectively, they are even more powerful, delivering the end-to-end intelligent services required to protect, optimize, and grow your network as your technology and business needs evolve.

Over the past 20 years, networks have transformed the way people live, work, and play, enhancing and accelerating communication in countless ways. Yet each new benefit comes at a price. The proliferation of powerful desktop computers, bandwidth-intensive applications, and new devices, such as wireless access points, IP phones, and video surveillance has left networks—and network managers—straining to keep up.

Cisco Systems, the worldwide leader in networking systems for organizations of every size, offers an architectural approach to networking that makes it easy for organizations to adapt and grow. As part of the foundation of the Intelligent Information Network, Cisco Catalyst switches provide the high availability, integrated security, delivery optimization, and enhanced manageability needed for today's most valuable converged network services, including networked applications, IP voice and video, wireless access, and other demanding applications.

Cisco Catalyst Switches

Quick Reference Guide

Introduction

Cisco Catalyst Family Overview	4
Technology Spotlight	6
Catalyst Family Feature Comparison	10

Modular Switches

Introduction	27
Cisco Catalyst 6500 Series	29
Cisco Catalyst 4500 Series	41

Fixed-Configuration Switches

Introduction	49
Cisco Catalyst 4900 Series	51
Cisco Catalyst 3750 Series	55
Cisco Catalyst 3560 Series	65
Cisco Catalyst 2960 Series	73
Cisco Catalyst 2950 Series	79
Cisco Catalyst 2940 Series	87
Cisco Catalyst Express 500 Series	91

Optics

Introduction	96
Cisco Optics General Overview	96
Cisco Optics Product Overview	98

Intelligent Switching for the Evolving Network

From core to edge, Cisco Catalyst switches provide the performance, high availability, comprehensive security, delivery optimization, and enhanced manageability needed to get the most out of your network for years to come.

MODULAR SWITCHES



Cisco Catalyst 6500 Series

Optimized for secure, converged voice, video, and data networks, the Catalyst 6500 offers industry-leading scalability (32 Gbps to 720 Gbps), operational control, and investment protection to meet the needs of enterprises, medium-sized businesses, and service providers.

- **Flexible Options:** Modular 3-, 4-, 6-, 9-, and 13-slot chassis all support redundant supervisors; LAN/WAN service modules; modular Power over Ethernet (PoE), and forwarding engines
- **Highest Availability:** Non-stop Forwarding/Stateful Switchover (NSF/SSO) offering sub-second failover; Cisco IOS Software Modularity featuring subsystem In Service Software Upgrades (ISSUs); Generic Online Diagnostics (GOLD)
- **Comprehensive Security:** H/W-based Control Plane Policing (CoPP); integrated HW NetFlow; 802.1x enhancements; firewall; web VPN; intrusion prevention and anomaly detection modules
- **Enhanced Manageability:** CiscoWorks; CNA; subsystem ISSUs with IOS modularity; integrated TDR; Encapsulated Remote Span (ERSPAN); Embedded Event Manager (EEM); Network Analysis Module (NAM)
- **Highest Port Densities:** Up to 1,152 10/100 ports, 577 10/100/1000 ports, 410 SFP Gigabit Ethernet ports, or 32 10 GbE ports
- **IP Communications:** Highest integrated PoE density; TDM/analog gateway module; advanced IP multicast and QoS
- **Integrated Service Modules:** Content switching, Application-Oriented Networking (AON), and wireless service modules



Cisco Catalyst 4500 Series

Midrange modular platform offering Layer 2–4 switching intelligent network services up to 136 Gbps, and added investment protection for enterprises, small- to medium-sized businesses, and service providers.

- **Flexible Options:** Modular 3- and 6-slot single supervisor chassis and 7- and 10-slot redundant supervisor chassis supporting numerous connectivity and service configurations
- **Highest Availability:** Redundant supervisor engines with Stateful Switchover offering 50ms failover; hot-swappable fan trays with redundant fans
- **Comprehensive Security:** 802.1x; NetFlow; access control lists and SSH
- **Comprehensive Management:** CiscoWorks; CNA; RSPAN; TDR and NetFlow
- **High Port Density:** Up to 384 Fast Ethernet or Gigabit Ethernet ports available in copper or fiber in 10 Gigabit uplinks; integrated man-in-middle attack prevention; PoE (Cisco pre-standard and IEEE 802.3af)
- **Investment Protection:** Functionally transparent line cards allow for easy upgrade of all system ports to higher level functions with Supervisor upgrade.

FIXED-CONFIGURATION SWITCHES



Cisco Catalyst 4900 Series

Fixed-configuration switches offering Layer 2–4 switching intelligent high-performance, rack-optimized server switching for organizations of all sizes.

- Standalone fixed-configuration for low-latency and wirespeed switching
- Layer 2–4 switching and intelligent services with dynamic IP routing and IPv6
- Up to 48 10/100/1000 ports with 4 SFP ports or 48 10/100/1000 ports with two 10 GbE ports
- Dual, hot-swappable internal AC or DC power supplies
- Hot-swappable fan trays



Cisco Catalyst 3750 Series

Stackable switches offering multilayer switching and Cisco StackWise™ technology for enterprise branch offices and midsize organizations.

- Stackable fixed-configuration switches featuring Cisco StackWise technology, a 32 Gbps interconnect for a unified, resilient system of up to nine switches
- Layer 2–4 switching and intelligent services with dynamic IP routing and IPv6
- Fast Ethernet, Gigabit Ethernet, and 10 Gigabit Ethernet (10 GbE) connectivity
- Up to 48 10/100/1000 ports plus 4 SFP ports per stackable switch
- Integrated PoE (Cisco pre-standard and IEEE 802.3af); up to 24 ports with 15.4 watts or 48 ports with 73 watts
- AC power supply failure protection with external power supply



Cisco Catalyst 3560 Series

Fixed-configuration switches combining Gigabit Ethernet connectivity and PoE for small enterprise LAN access and branch office deployments.

- Standalone fixed-configuration switches
- Layer 2–4 switching and intelligent services with dynamic IP routing and IPv6
- Fast Ethernet and Gigabit Ethernet connectivity
- Up to 48 10/100/1000 ports plus 4 SFP ports
- Integrated PoE (Cisco pre-standard and IEEE 802.3af); up to 24 ports with 15.4 watts or 48 ports with 73 watts
- AC power supply failure protection with external power supply



Cisco Catalyst 2960 Series

Fixed-configuration switches offering Fast Ethernet and Gigabit Ethernet connectivity with enhanced LAN services for mid-market and branch office networks.

- Standalone fixed-configuration switches
- Layer 2 switching with intelligent Layer 2–4 services
- Fast Ethernet and Gigabit Ethernet connectivity
- Up to 48 10/100 ports or 10/100/1000 ports
- AC power supply failure protection with external power supply



Cisco Catalyst 2950 Series

Fixed-configuration switches offering Fast Ethernet and Gigabit Ethernet connectivity for branch offices, small wiring closets, and industrial deployments.

- Standalone fixed-configuration switches
- Layer 2 switching with intelligent Layer 2–4 services
- Fast Ethernet connectivity with Gigabit Ethernet Uplinks
- Up to 48 10/100 ports
- AC power supply failure protection with external power supply; DC power option available



Cisco Catalyst 2940 Series

Compact fixed-configuration switches delivering Fast Ethernet connectivity for workgroup, conference room, and classroom deployments.

- Standalone fixed-configuration Layer 2 switches with no fan
- Fast Ethernet connectivity with Gigabit Ethernet Uplinks
- Up to 8 10/100 ports




Cisco Catalyst Express 500 Series

Cisco-class switches that make advanced network services and IP Communications easy to manage for businesses with 20 to 250 employees.

- Standalone fixed-configuration Layer 2 switches
- Fast Ethernet and Gigabit Ethernet connectivity
- Up to 24 10/100 ports with optional PoE or 12 10/100/1000 ports

The architectural foundation of the Intelligent Information Network.

Cisco Systems offers the industry’s most complete range of switching solutions, supporting a wide variety of deployment requirements in networks of every size. Yet Cisco Catalyst switches are much more than a collection of point products to meet isolated IT needs; they are part of an integrated approach to the broader goals of protecting, optimizing, and growing networks for years to come.

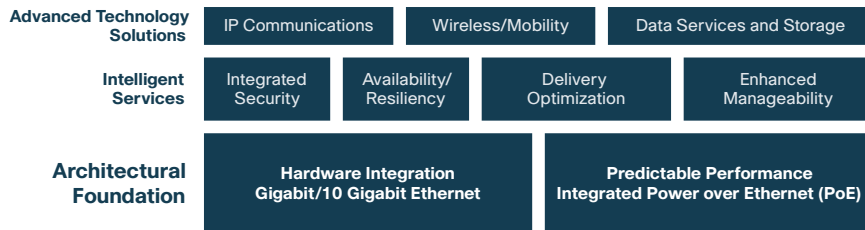

Cisco Catalyst switches provide an architectural foundation for the intelligent services that enable new applications and uses for the network. Key elements include:

Hardware Integration

At the core of Cisco’s hardware integration is application-specific integrated circuit (ASIC) innovation. Cisco has developed more than one hundred ASICs for the Cisco Catalyst switching family since 1995, with each generation including more capabilities. For example, Cisco was the first vendor to integrate Layer 3 switching into hardware, and has gone on to integrate security access control lists (ACLs), quality of service (QoS) classification, and queuing across the entire Cisco Catalyst line. Cisco is also the only switching vendor to offer hardware-based services modules, which integrate key functions such as firewalling, content networking, and network analysis directly into Catalyst 6500 switches.

Predictable Performance

Cisco offers among the highest performance modular and stackable switches in the industry, but throughput alone is not enough. Organizations need to be assured of predictable performance, regardless of variables like congestion, traffic type, or the use of software- or hardware-enabled services. That’s why all Cisco Catalyst switches are designed to maintain predictable performance through a unique combination of mechanisms, including Cisco Express Forwarding (CEF), Ternary Content Addressable Memory (TCAM), buffering, and congestion management. This ensures that network managers can enable complex features without fear of losing speed in their networks.

High-Density Gigabit and 10 Gigabit Ethernet

The Catalyst portfolio leads the industry in Gigabit and 10 Gigabit Ethernet (10 GbE) port density. Desktop Gigabit Ethernet, also called 10/100/1000, provides investment protection for future connectivity needs while also making use of the “free” LAN-on-motherboard solutions shipping on most new desktop and laptop computers. Additionally, the ability to process networked applications faster means that each PC’s performance improves, increasing productivity. Similarly, 10 GbE is being rapidly adopted in many enterprise networks, particularly in the network core, distribution, and in data center networks. Together, Gigabit Ethernet and 10 GbE help to ensure rapid access into the network and between network devices.

Power over Ethernet

Cisco pioneered the delivery of Power over Ethernet (PoE), simplifying the deployment of devices such as IP phones and wireless access points by eliminating the need for additional power cabling. Cisco drove the 802.3af power standard through IEEE and today offers extensions to the IEEE standard through the use of intelligent power management. In keeping with Cisco’s evolutionary approach, the Cisco Catalyst line includes switches that support both pre-standard inline power as well as IEEE 802.3af-compliant devices, enabling our customers to deploy new technology while continuing to make the most of past investments.

End-to-end intelligent switching for today's converged network services.

The LAN switching infrastructure connects users, applications, and communications systems together. That basic task has become much more challenging as the variety and complexity of network uses have increased. Cisco Catalyst switches provide the intelligent services required to create secure, resilient networks that optimize the delivery of disparate services, yet remain easy to configure, manage, and troubleshoot.

Cisco Catalyst switches support today's technology trends and business goals through a unique combination of intelligent capabilities. Major advantages include:

Integrated Security

Cisco Catalyst switches help make networks self-defending. Encrypted passwords, multilevel account privileges, and authentication protocols prevent unauthorized network access—a problem exacerbated by the rapid adoption of wireless networking. The switches can also prevent devices from connecting if they fail to meet certain criteria, such as having the latest antivirus software. Users can be separated into private subnets to permit varying levels of access. Other features enable the switches to protect themselves from worms and denial-of-service (DoS) attacks, prevent routing and spanning tree information from being spoofed, and ensure malicious users can't steal confidential information, either from the company or from other employees.

Delivery Optimization


Today's networks must be intelligent and adaptable enough to meet the varying requirements of converged data, voice, video, and storage traffic. Cisco Catalyst switches optimize the delivery of disparate traffic types using three key technologies: quality of service (QoS), multicast, and content switching. QoS allows network managers to prioritize traffic and ensure low-latency traffic such as voice gets handled accordingly. Multicast makes it much more efficient to deliver video or music on-hold to multiple points on the network, reducing the burden on servers. The Cisco Catalyst 6500 Series Content Switching Module adds advanced Layer 4–7 load balancing to the Catalyst line's existing Layer 2 and 3 features, further optimizing service delivery.

Availability and Resiliency

Cisco Catalyst switches help maintain the highest levels of network availability and resiliency. Each switch is designed to protect itself from hardware, software, power, or connection failures—or at the very least, minimize recovery times by enabling redundant backup systems and protocols to take over in as little as a millisecond. The switches are also designed to increase resiliency on a network-wide level, utilizing an array of Cisco innovations to recover from device, link, or protocol failures and maintain uninterrupted access. Integrated security features also play a role in preserving availability in the event of incidents like DoS attacks. Conversely, resilient designs help networks recover faster from security breaches, or even nullify their impact.

Enhanced Manageability

All Cisco Catalyst switches offer enhanced capabilities that make them much easier to configure, manage, and troubleshoot. These include wizards that automatically configure switches, integrated Web-based management tools, device discovery and intelligent power management features for PoE equipment such as IP phones and wireless access points, and an array of data collection and analysis tools. The benefits are real-time visibility, faster response and repair times, more adaptive policy management, and reduced cost and complexity. In the case of the Cisco Catalyst 6500 Series, optional Network Analysis Modules embed a rich set of management features on a single blade, providing volumes of performance information without burdening the switch itself.

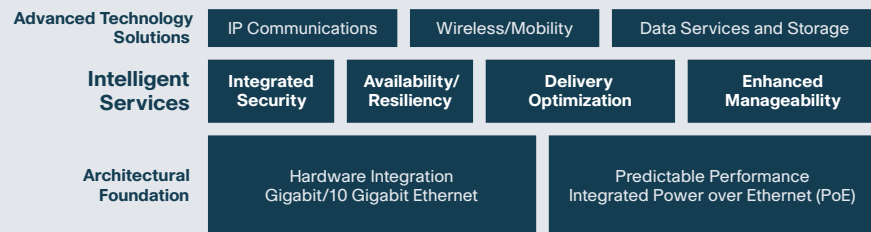

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
LAN SWITCHING FEATURES									
Connectivity and Filtering									
EtherChannel®/802.3ad	▪	▪	▪	▪	▪	▪	▪	▪	▪
Jumbo Frames—Gigabit Ethernet on Copper	▪	6-port card only	▪	L2 only	L2 only	L2 only			
Jumbo Frames—Gigabit Ethernet on Fiber	▪	all non-blocking ports	▪	L2 only	L2 only	L2 only			
Broadcast Suppression	▪	▪	▪	▪	▪	▪	▪	▪	▪
Multicast Suppression	▪	▪	▪	▪	▪	▪	▪	▪	▪
Layer 2									
ISL/802.1Q	▪	▪	▪	▪	▪	802.1Q only	802.1Q only	802.1Q only	802.1Q only
Private VLAN Edge	▪	▪	▪	▪	▪	▪	▪	▪	▪
Private VLAN	▪	▪	▪	IP Services	IP Services				
Voice VLAN	▪	▪	▪	▪	▪	▪	▪	▪	▪
VLAN Trunking Protocol (VTP)	▪	▪	▪	▪	▪	▪	▪	▪	transparent mode only
GVRP	▪								
GARP	▪								
URT/VMPS	▪	▪	▪	▪	▪	▪	▪	▪	▪
VTP v3	▪								
VTP Bomb Protection	▪								
VMPS Server	▪								
Number of Active VLANs	4,096	4,096	2,048	1,005	1,005	255	64 (SI), 128 (EI)	12	32
Number of VLAN IDs	4,096	4,096	4,096	4,096	4,096	4,096	4,096	4,096	1,005
Layer 3									
H/W-based MPLS/EoMPLS	▪								
EIGRP	▪	▪	▪	IP Services	IP Services				
OSPF	▪	▪	▪	IP Services	IP Services				
BGP	▪	▪	▪	IP Services	IP Services				
Equal Cost Load Balancing	▪	▪	▪	▪	▪				
RIP, RIPv2	▪	▪	▪	▪	▪				
Static Routes	▪	▪	▪	▪	▪				
IS-IS	▪	▪	▪						
H/W-based IPv6 Routing	▪	in software	in software	Advanced IP Services	Advanced IP Services				

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES							
	Catalyst 6500	Catalyst 4500	Catalyst 4900		Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
LAN SWITCHING FEATURES <small>continued</small>										
Layer 3 <small>continued</small>										
H/W-based Policy Routing IPv4	▪	▪	▪		IP Services	IP Services				
H/W-based Policy Routing IPv6	▪									
Multiprotocol Routing (IPX, AppleTalk)	▪	▪	▪							
Cisco Express Forwarding (CEF)	▪	▪	▪		▪	▪				
H/W FIB Entries	up to 1,000,000	up to 128,000	up to 128,000		up to 20,000	up to 11,000				
VRF Lite	IP Services	IP Services	IP Services		IP Services	IP Services				
INTEGRATED SECURITY										
Access Control Lists										
Reflexive ACL	▪									
Port ACL	▪	▪	▪		▪	▪	▪	EI only		
Time-Based ACL	▪	▪	▪		▪	▪	▪	▪		
Router ACL	▪	▪	▪		▪	▪				
VLAN ACL	▪	▪	▪		▪	▪				
VACL with Redirect/Capture/Logging of Denied Traffic	▪	**	**		capture and logging	capture and logging				
Context-based Access Control	▪									
H/W-based Access Control Entry (ACE) Counters	▪									
Order Dependent ACL Merge	▪									
Dedicated Hardware Resources for Security ACLs	▪	▪	▪							
ACL Scalability (ACE entries)	32,000	32,000	32,000		1,000	1,000	512	300 ACP—EI only		
Attack Mitigation										
Control Plane Policing (Multiple CPU Rate Limiters)	▪									
IP Source Guard	▪	▪	▪		▪	▪				
DHCP Snooping/Option 82	▪	▪	▪		▪	▪	▪	▪	SI Option 82 only	
Dynamic ARP Inspection	▪	▪	▪		▪	▪				
MAC Address Notification	▪	▪	▪		▪	▪	▪	▪	▪	▪
Port Security	▪	▪	▪		▪	▪	▪	▪	▪	▪
H/W-based uRFP Check	▪									
H/W-based MAC Learning	▪									
H/W-assisted MAC Aging	▪									

*As part of IP ACL in VLAN MAP but not for the entire VACL.

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
INTEGRATED SECURITY <small>continued</small>									
Attack Mitigation <small>continued</small>									
Routing Protocol Pass Through	▪								
ARP Policing	▪								
H/W-based Directed Broadcast	▪								
Trust and Identity Management									
802.1x Identity-based Networking Port Authentication	▪	▪	▪	▪	▪	▪	▪	▪	▪
802.1x with VLAN assignment	▪	▪	▪	▪	▪	▪	▪	▪	
802.1x with Guest VLAN	▪	▪	▪	▪	▪	▪	▪	▪	
802.1x with Aux. VLAN Support	▪	▪	▪	▪	▪	▪	▪	▪	
TACACS+/RADIUS	▪	▪	▪	▪	▪	▪	▪	▪	RADIUS only
Secure Connectivity									
H/W-based NAT/PAT	▪								
MD5 Route Authentication	▪	▪	▪						
Multilevel Account Privilege	▪	▪	▪	▪	▪				
AVAILABILITY AND RESILIENCY									
Switch Redundancy									
IOS Software Modularity	▪								
Non-stop Forwarding/Stateful Switchover (NSF/SSO)	▪								
Stateful Switchover (SSO)	▪	▪							
NSF-aware	▪	▪	▪	▪	▪				
Redundant Power Supplies	▪	▪	▪	external only	external only	external only	external only		WS-CES500-24PC only
Redundant Fans	▪	▪	▪						
Redundant Supervisors	▪	▪							
Generic Online Diagnostics (GOLD)	▪								
Real-time Diagnostics	▪	▪	▪						
Power Supply Failure Redundancy	▪	▪	▪	▪	▪	▪	▪		24PC only
Power Circuit Failure Redundancy	▪	▪	▪						
Network Protocols									
Unidirectional Link Detection (UDLD)	▪	▪	▪	▪	▪	▪	▪	▪	▪
Gateway Load Balancing Protocol (GLBP)	▪								

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
AVAILABILITY AND RESILIENCY <i>continued</i>									
Network Protocols <i>continued</i>									
Hot Standby Routing Protocol (HSRP)	▪	▪	▪	▪	▪				
Virtual Router Redundancy Protocol (VRRP)	▪								
UplinkFast/BackBoneFast/802.1w	▪	▪	▪	▪	▪	▪	▪	▪	▪
PortFast	▪	▪	▪	▪	▪	▪	▪	▪	▪
Per VLAN STP (PVSTP)	▪	▪	▪	▪	▪	▪	▪	▪	▪
Multiple Instance STP (MISTP)/802.1s	▪	▪	▪	▪	▪	▪	▪	▪	▪
STP Root/BDPDU/Loop Guard	▪	▪	▪	▪	▪	▪	▪	▪	▪
IP Event Dampening	▪								
Bidirectional Forwarding Detection	▪								
Digital Optical Monitoring	▪	▪	▪						
Flexlink	▪			▪	▪	▪			
DELIVERY OPTIMIZATION									
Quality of Service									
Number of Queues per Port	up to 8	4	4	4	4	4	4	4	4
Congestion Avoidance	▪	▪	▪	WTD	WTD	WTD			WTD
L2-L3 Re-write/Mapping	▪	▪	▪	▪	▪	▪	El only		
Ingress Queuing	▪	N/A	N/A	▪	▪	▪			
Ingress Strict Priority	▪	N/A	N/A	▪	▪	▪			
Egress Queuing	▪	▪	▪	▪	▪	▪	▪	▪	▪
Egress Strict Priority	▪	▪	▪	▪	▪	▪	▪	▪	▪
Traffic Classification	▪	▪	▪	▪	▪	▪	▪	▪	▪
IP Service Level Agreement	▪								
Policers									
H/W-based Policing	▪	▪	▪						
Per-port Policers	▪	▪	▪	▪	▪	▪	El only		
Per-VLAN Policers	▪	▪	▪						
H/W-based Aggregate Policers	▪	▪	▪	▪	▪				
Hierarchical Policers	▪								
User-based (Source IP) Rate Limiting	▪	▪							
Shaped Round Robin	▪			▪	▪	▪			

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
DELIVERY OPTIMIZATION <i>continued</i>									
Multicast									
H/W-based IPv6 Multicast	▪	in software	in software		no PIM	no PIM			
H/W-based IPv4 Multicast	▪	▪	▪		▪	▪	▪	▪	▪
H/W-based Bi-directional PIM	▪								
Multicast Manager	▪								
Source Specific Multicast (SSM)	▪	▪	▪						
Multicast NSF/SSO	▪								
PIM Sparse	▪	▪	▪		▪	▪			
PIM Dense	▪	▪	▪		▪	▪			
PIM Sparse/Dense	▪	▪	▪		▪	▪			
PIM Snooping	▪								
IGMP V1/V2	▪	▪	▪		▪	▪	▪	▪	▪
IGMP V3	▪	▪	▪		▪	▪	▪	▪	▪
CGMP	▪	▪	▪		▪	▪			
RGMP	▪								
DVMRP Interoperability	▪	▪	▪		▪	▪			
Number of Multicast Routes	32,000	28,000	28,000		1,000	1,000			
IGMP Snooping	▪	▪	▪		▪	▪	▪	▪	▪
IGMP Querier	▪				▪	▪			
SSM Mapping	▪	▪	▪						
H/W-based Multicast Tunneling	▪								
mVRF Lite	▪								
Multicast VPN (mVPN)	▪								
Tunneling Protocols									
H/W-based GRE	▪	in software	in software						
H/W-based Multipoint GRE	▪	▪	▪						
H/W-based IPv4 in IPv6	▪	in software	in software						
H/W-based IP in IP	▪	in software	in software						

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
ENHANCED MANAGEABILITY									
Embedded Event Manager	▪								
Cisco Discovery Protocol (CDP)	▪	▪	▪	▪	▪	▪	▪	▪	▪
Time Domain Reflectometry (TDR) Interface 10/100	▪					▪			▪
Time Domain Reflectometry (TDR) Interface 10/100/1000	▪	▪	▪	▪	▪	▪			▪
Cisco Network Assistant (CNA)	▪	▪	▪	▪	▪	▪	▪	▪	▪
Smartports	▪	▪	▪	▪	▪	▪	▪	▪	▪
NetFlow	▪	▪							
NetFlow Data Export	▪	▪							
Syslog	▪	▪	▪	▪	▪	▪	▪	▪	▪
Switch TopN	▪								
SNMP	▪	▪	▪	▪	▪	▪	▪	▪	▪
RMON	▪	▪	▪	▪	▪	▪	▪	▪	▪
SPAN	▪	▪	▪	▪	▪	▪	▪	▪	▪
RSPAN	▪	▪	▪	▪	▪	▪	EI only		
ERSPAN	▪								
L2-Traceroute	▪	▪	▪	▪	▪	▪	▪	▪	▪
SSH v2	▪	▪	▪	▪	▪	▪	▪	▪	▪
AutoQoS	▪	▪	▪	▪	▪	▪	EI only		
E-911 MIB Support	▪	▪	▪	▪	▪	▪	▪	▪	▪
Management Port—RJ45	▪	▪	▪						
Management Port—USB	▪								
Compact Flash	▪	▪							
Configuration Rollback	▪								
Call Home	▪								
Digital Optical Monitoring	▪								
NETFLOW									
Integrated H/W-based NetFlow	▪	▪							
NetFlow Top Talkers	▪								
Sampled NetFlow	▪								
NetFlow v9	▪								

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
NETFLOW <i>continued</i>									
Multicast NetFlow	▪								
Per Interface NetFlow Data Export	▪	▪							
Bridged IP Flows	▪	▪							
NetFlow v5	▪	▪							
NetFlow v8	▪	▪							
Microflow Policing	▪	▪							
SOFTWARE MODULARITY									
Subsystem In Service Software Upgrade (ISSU)	▪								
Fault Containment	▪								
Memory Protection	▪								
Process Restartability	▪								
APPLICATION, SECURITY, AND MANAGEABILITY MODULES									
Virtualized Firewall Module	▪								
Intrusion Detection and Prevention Module	▪								
VPN: IPsec, SSL Module	▪								
Anomaly Detection and Guard Module	▪								
Network Analysis Module	▪								
Communication Media Module	▪								
Wireless LAN Service Module	▪								
Content Switching and SSL Module	▪								
Application-oriented Networking Module	▪								
IPT SOLUTION									
802.3af—15W on 48 ports in a module/ fixed switch	▪	▪							
802.3af—7W on 48 ports in a module/ fixed switch	▪	▪			▪	▪			
802.3af—15W on 24 ports in a module/ fixed switch	▪	▪			▪	▪			▪
802.3af Modular PoE Daughter Card	▪								
Subsystem In Service Software Upgrade (ISSU)	▪								
Fast Link Failure Detection (Bidirectional Forwarding Detection)	▪								
Redundant Supervisors with Stateful Switchover	▪	▪							

Cisco Catalyst Switches: **FEATURE COMPARISON**

	MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
IPT SOLUTION <i>continued</i>									
Redundant Power Supply	▪	▪	▪	▪	▪				
Redundant Power Circuit	▪	▪	▪						
Communication Media Module	▪								
AutoQoS	▪	▪	▪	▪	▪	▪	El only		
Encapsulated RSPAN	▪								
IP Service Level Agreement	▪								
SYSTEM SCALABILITY									
Aggregate Bandwidth (Gbps)	32–720	64–136	96–136	8.8–32	8.8–32	8.8–32	8.8–13.6	3.6	8.8–24
Packets per Second (Mpps)	15–410	48–102	72–102	6.5–39	6.5–39	6.5–35.7	6.5–10.1	2.7	6.5–179
Modular Memory Upgrade	▪								

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

Cisco Catalyst Modular Switches

The Cisco Catalyst 6500 and 4500 Series modular switches provide customers with an intelligent high performance platform for deploying numerous concurrent intelligent services without degrading the overall performance of the switch. With a broad selection of line cards, power supplies, and their highly versatile architecture, modular switches deliver the highest levels of port density and flexibility, including PoE scalability to deploy new converged applications and extending investment protection well into future. The modular architecture also provides scalable performance via a selection of supervisors which can be upgraded to enhance the performance and service features of the entire switch as needed.

To minimize costly user downtime, modular switches are optimized for high availability. Critical redundant hardware and software features deliver the highest resiliency for all places in the network. Another key advantage is the ease of use of modular switches. Modular switches have a single IOS image to manage no matter how many line cards are inserted. This allows for simpler IOS configurations, updating, and management leading to a reduction in overall cost of ongoing operations.



Cisco Catalyst 6500 Series

Flagship modular switches offering the highest levels of intelligence, operational efficiency, scalability, investment protection, and performance for enterprise customers, medium-sized businesses, and service providers.

The Cisco Catalyst 6500 Series continues to be the industry's most innovative switching platform, delivering the highest levels of availability, integrated security, virtualization, enhanced manageability, IP communications, wireless, and applications support. The feature-richness, flexibility, density, and scalability of this product line sets the standard for converged data, voice, and video networks, and enables maximum operational efficiency and investment protection.

This flagship switch series offers integrated service modules that provide high-speed advanced services such as firewalling, Web VPN, intrusion detection, application-oriented networking, content switching, SSL termination, network analysis, wireless, and TDM/analog gateway.

Delivering up to 720 Gbps of performance, the platform also offers the investment protection of backwards compatibility by enabling new services and functions on older line cards by simply upgrading a supervisor. With a choice of Modular 3-, 4-, 6-, 9-, and 13-slot chassis, the Cisco Catalyst 6500 Series scales to support the highest port densities for PoE, 10/100 Fast Ethernet, 10/100/1000 Gigabit Ethernet, and 10 Gigabit Ethernet.

Hardware Features: Catalyst 6500 Chassis

Chassis	WS-C6503-E	WS-C6504-E	WS-C6506-E	WS-C6509-E	WS-C6509-NEB-A	WS-C6513
Slots	3	4	6	9	9	13
Gigabit Ethernet GBIC/SFP density	98	144	242	386	384	410
10 GbE XENPAK/X2 port density	8	12	20	32	32	20
10/100/1000 density	97	144	241	385	385	577
10/100 density	192	288	480	768	768	1152
100BASE-FX density	96	144	240	384	384	576
Max. watt power consumption (redundant mode)						
AC Internal (redundant mode)	1,400	2,700	6,000	6,000	6,000	6,000
AC External with power shelf (redundant mode)	N/A	N/A	N/A	N/A	N/A	N/A
DC Internal (redundant mode)	950	2,700	4,000	4,000	4,000	4,000
Max. number of Class 3 devices (15.4W) Max. power supplies						
AC Internal (redundant mode)	48	110	284	288	215	281
AC External with power shelf (redundant mode)	N/A	N/A	N/A	N/A	N/A	N/A
DC Internal (redundant mode)	31	110	173	184	206	176
Dimension (H x W x D) inches	7 x 17.37 x 21.75	8.75 x 17.5 x 21.75	19.2 x 17.5 x 18.2	24.5 x 17.5 x 18.2	33.3 x 17.2 x 18.1	33.3 x 17.3 x 18.1
Dimension (H x W x D) centimeters	17.8 x 44.1 x 55.2	22.2 x 44.5 x 55.2	48.8 x 44.5 x 46.0	62.2 x 44.5 x 46.0	84.6 x 43.7 x 46.0	84.6 x 43.7 x 46.0
Rack Unit (RU)	4	5	12	15	21	20
Unit weight pounds (kilograms) (chassis only)	33 (15.0)	40 (18.1)	50 (22.7)	60 (27.3)	55 (24.9)	98 (45.0)

Hardware Features: Catalyst 6500 Supervisor Engines

Supervisor Engines	WS-SUP720-3BXL WS-SUP720-3B	WS-SUP32-10GE-3B WS-SUP32-GE-3B	WS-X6K-S2U-MSFC2 WS-X6K-S2-MSFC2 WS-X6K-S2U-PFC2
Chassis supported	All	All	All
Bandwidth per slot (Gbps)	40GB	32GB shared	32GB shared/ 8GB if SFM present
Total bandwidth (Gbps)	720	32	256
Packets per second (Mpps)	407	15	210
MAC addresses supported	64K Max./32K effective	64K Max./32K effective	128K Max./32K effective
Routes supported	1,000,000	1,000,000 if PFC3BXL	256,000
Onboard memory (DRAM)	Up to 1GB	Up to 1GB	Up to 512MB

Series Spotlight

Cisco IOS Software Modularity

Catalyst 6500 Series with Cisco IOS Software Modularity boosts operational efficiency and minimizes downtime through evolutionary software infrastructure advancements. By enabling modular Cisco IOS subsystems to run as independent, self-healing processes, this innovation minimizes unplanned downtime through fault containment and stateful process restarts, simplifies software changes through subsystem In-Service Software Upgrades (ISSU), and enables process-level, automated policy control by integrating the Embedded Event Manager (EEM).

Maximum PoE Scalability

Cisco Catalyst 6500 Series provides the industry leading levels of power scalability needed to support high-density PoE deployments. The enhanced 6- and 9-slot chassis (C6506-E and C6509-E models) are designed to scale beyond the current 6000W power supplies. Continuing this product line's tradition of unmatched investment protection, all existing supervisors, line cards, switch fabrics, and software releases are supported in the E-series chassis.

Product Overview

CATALYST 6500—CHASSIS

Product Number	Description
WS-C6503-E	Enhanced 3-slot chassis, no fan or power supply
WS-C6504-E	Enhanced 4-slot 6500 chassis, no fan or power supply
WS-C6506-E	Enhanced 6-slot 6500 chassis, no fan or power supply
WS-C6509-E	Enhanced 9-slot 6500 chassis, no fan or power supply
WS-C6509-NEB-A	9-slot 6500 chassis (vertically oriented slots), no fan or power supply
WS-C6513	13-slot 6500 chassis, no fan or power supply

CATALYST 6500—SUPERVISOR ENGINES AND SWITCH FABRIC MODULES

Product Number	Description
WS-SUP720-3B	Supervisor 720 fabric MSFC3 PFC3B
WS-SUP720	Supervisor 720 fabric MSFC3 PFC3A
WS-SUP32-10GE-3B	Supervisor 32 with 2 ports 10 GbE and PFC3B
WS-SUP32-GE-3B	Supervisor 32 with 8 GbE uplinks and PFC3B
WS-X6K-S2U-MSFC2	Supervisor 2U, 256 MB Supervisor, 512 MB MSFC2
WS-X6K-S2-MSFC2	Supervisor Engine-2, 2 GbE, plus MSFC-2/PFC-2
WS-X6K-S2-PFC2	Supervisor Engine-2, 2 GbE, plus PFC-2
WS-X6500-SFM2	Switch Fabric module 2

CATALYST 6500—10 GIGABIT ETHERNET

Product Number	Description
WS-X6704-10GE	4-port 10 Gigabit Ethernet module (requires XENPAK)

CATALYST 6500—GIGABIT ETHERNET

Product Number	Description
WS-X6408A-GBIC	8-port Gigabit Ethernet module, enhanced QoS (requires GBICs)
WS-X6516A-GBIC	16-port Gigabit Ethernet module, fabric-enabled (requires GBICs)
WS-X6724-SFP	24-port Gigabit Ethernet module, fabric-enabled (requires SFPs)
WS-X6748-SFP	48-port Gigabit Ethernet module, fabric-enabled (requires SFPs)

Product Overview *continued***CATALYST 6500—10/100/1000 ETHERNET**

Product Number	Description
WS-X6148A-GE-TX	48-port 10/100/1000 with Jumbo Frame, RJ-45
WS-X6148A-GE-45AF	48-port PoE 802.3af 10/100/1000, with Jumbo Frame
WS-X6516-GE-TX	16-port 10/100/1000 Gigabit Ethernet module, cross-bar
WS-X6548-GE-TX	48-port fabric-enabled 10/100/1000 module
WS-X6548-GE-45AF	PoE 802.3af 10/100/1000 48-port (RJ-45) CEF256 card
WS-X6748-GE-TX	48-port 10/100/1000 Gigabit Ethernet module, fabric-enabled, RJ-45

CATALYST 6500—10/100 ETHERNET

Product Number	Description
WS-X6148-RJ-21	48-port 10/100 upgradeable to voice, RJ-21
WS-X6148-21AF	PoE 802.3af 10/100, 48-port (RJ-21) line card
WS-X6148-RJ21V	48-port 10/100 Inline Power module, RJ-21
WS-X6148A-RJ-45	48-port 10/100 with TDR, upgradeable to PoE 802.3af
WS-X6148A-45AF	48-port PoE 802.3af 10/100, card with TDR
WS-X6148X2-RJ-45	96-port 10/100 (RJ-45), upgradeable to PoE 802.3af
WS-X6148X2-45AF	PoE 802.3af 10/100, 96-port (RJ-45) line card
WS-X6196-RJ-21	96-port 10/100 upgradeable to PoE 802.3af
WS-X6196-21AF	96-port, PoE 802.3af 10/100-RJ-21
WS-X6548-RJ-21	48-port 10/100, RJ-21, fabric-enabled
WS-X6548-RJ-45	48-port 10/100, RJ-45, x-bar

CATALYST 6500 10FL/100FX ETHERNET

Product Number	Description
WS-X6024-10FL-MT	24-port 10BASE-FL MT-RJ module
WS-X6148-FE-SFP	48-port 100BASE-X module (requires SFP)
WS-X6524-100FX-MM	24-port 100FX, MT-RJ, fabric-enabled

Product Overview *continued***CATALYST 6500—SERVICES MODULES**

Product Number	Description
WS-X6066-SLB-APC	Catalyst 6000 Content Switching module
WS-X6066-SLB-S-K9	Content Switching module with SSL daughter card
WS-SVC-ADM-1-K9	Catalyst 6500 Cisco Anomaly Detection module
WS-SVC-AGM-1-K9	Catalyst 6500 Cisco Anomaly Guard module
WS-SVC-CMM	Communication Media module
WS-SVC-CMM-6E1	6-port E1 Interface Port Adapter
WS-SVC-CMM-6T1	6-port T1 Interface Port Adapter
WS-SVC-CMM-ACT	Adhoc Conferencing and Transcoding Port Adapter
WS-SVC-CMM-24FXS	24-port FXS Interface Port Adapter
WS-SVC-CSG-1	Content Services Gateway
WS-SVC-FWM-1-K9	Firewall blade for 6500 and 7600, VFW license separate
WS-SVC-IDS2-BUN-K9	600M IDS2-2 module for Catalyst 6500
SPA-IPSEC-2G	IPSec SPA with 2 Gbps DES/3DES/AES
7600-SSC-400	Cisco 7600/6500 Services SPA Carrier Card (6 Gbps)
SPA-IPSEC-SSC400-1	Cisco 6500/7600 IPSec VPN Bundle 1: 1 IPSec VPN SPA + SSC-400
SPA-IPSEC-SSC400-2	Cisco 6500/7600 IPSec VPN Bundle 2: 2 IPSec VPN SPA + SSC-400
WS-SVC-IPSEC-1	IPSec VPN Security module for 6500 and 7600 Series
WS-SVC-MWAM-1	Multi-Processor WAN Application module
WS-SVC-NAM-1	Catalyst 6500 Network Analysis module-1
WS-SVC-NAM-2	Catalyst 6500 Network Analysis module-2
WS-SVC-PSD-1	Persistent Storage Device
WS-SVC-SSL-1-K9	SSL module
WS-X6608-E1	Catalyst 6000 8-port Voice E1 and Services module
WS-X6608-T1	Catalyst 6000 8-port Voice T1 and Services module
SC-ADM-4.0-K9	Cisco Traffic Anomaly Detector module MVP-OS R4.0 Software
SF-PIX-PDM-2.1	PIX Device Manager for FW module

Product Overview *continued***CATALYST 6500—FLEXWAN AND OS**

Product Number	Description
WS-X6582-2PA	Enhanced FlexWAN module, fabric-enabled
OSM-1CHOC12/T1-SI	1-port CHOC-12/CHSTM-4 (SM-IR), to DS0 and T1/E1, with 4 GbE
OSM-12CT3/T1	12-port Channelized DS-3 to DS-1/DS-0
OSM-1CHOC12/T3-SI	1-port CHOC-12/CHSTM-4 OSM, to T3/E3, SM-IR, with 4 GbE
OSM-2OC12-ATM-MM+	Enhanced 2-port OC12/STM4 ATM OSM+, MM, with 4 GbE
OSM-2OC12-ATM-SI+	Enhanced 2-port OC12/STM4 ATM OSM+, SI, with 4 GbE
OSM-2OC48/1DPT-SS	2-port OC-48/STM-16 POS/DPT OSM, SM-SR, with 4 GbE
OSM-2OC48/1DPT-SI	2-port OC-48/STM-16 POS/DPT OSM, SM-IR, with 4 GbE
OSM-2OC48/1DPT-SL	2-port OC-48/STM-16 POS/DPT OSM, SM-LR, with 4 GbE
OSM-8OC3-POS-SL+	Enhanced 8-port OC-3/STM-1 SONET/SDH SM-LR OSM, with 4 GbE
OSM-8OC3-POS-SI+	Enhanced 8-port OC-3/STM-1 SONET/SDH SM-IR OSM, with 4 GbE
OSM-4OC3-POS-SI+	Enhanced 4-port OC-3/STM-1 SONET/SDH SM-IR OSM, with 4 GbE
OSM-2OC12-POS-MM+	Enhanced 2-port OC-12/STM-4 SONET/SDH OSM, MM, with 4 GbE
OSM-4OC12-POS-SI+	Enhanced 4-port OC-12/STM-4 SONET/SDH OSM, SM-IR, with 4 GbE
OSM-2OC12-POS-SI+	Enhanced 2-port OC-12/STM-4 SONET/SDH OSM, SM-IR, with 4 GbE
OSM-1OC48-POS-SS+	Enhanced 1-port OC-48/STM-16 SONET/SDH OSM, SM-SR, with 4 GbE
OSM-1OC48-POS-SI+	Enhanced 1-port OC-48/STM-16 SONET/SDH OSM, SM-IR, with 4 GbE
OSM-1OC48-POS-SL+	Enhanced 1-port OC-48/STM-16 SONET/SDH OSM, SM-LR, with 4 GbE
OSM-2+4GE-WAN+	Enhanced OSM with 4 GbE WAN ports and 2 GbE LAN ports

CATALYST 6500—POWER SUPPLIES

Product Number	Description
PWR-950-AC	950W AC power supply for Cisco 7603 and Catalyst 6503
PWR-950-DC	950W DC power supply for Cisco 7603 and Catalyst 6503
PWR-1400-AC	1400W AC power supply for Cisco 7603 and Catalyst 6503 chassis
PWR-2700-AC/4	2700W AC power supply for Cisco 7604/6504-E
PWR-2700-DC/4	2700W DC power supply for Cisco 7604/6504-E
PEM-15A-AC	Power Entry module for Cisco 7603 and Catalyst 6503 (950W AC power supply)
PEM-20A-AC+	Power Entry module used with 1400W AC power supply for Cisco 7603 and Catalyst WS-C6503

Product Overview *continued***CATALYST 6500—POWER SUPPLIES** *continued*

Product Number	Description
PEM-DC/3	DC Power Entry module for Cisco 7603 and Catalyst 6503
WS-CDC-1300W	Catalyst 6000 1300W DC power supply
WS-CAC-3000W	Catalyst 6500 3000W AC power supply
WS-CDC-2500W	Catalyst 6000 2500W DC power supply
WS-CAC-4000W-INT	4000W AC power supply, International (cable included)
WS-CAC-4000W-US	4000W AC power supply for U.S. (cable attached)
PWR-4000-DC	4000W DC power supply for Cisco 7609/13, Catalyst 6509/13 chassis
WS-CAC-6000W	Catalyst 6500 6000W AC power supply

Product Transitions: C6500, Power Supplies, Supervisors, Line Cards

Cisco Catalyst 6500 Series switches and product accessories offer enhanced features providing users of either Catalyst 6000 or 6500 Series products a direct transition solution that integrates seamlessly into existing networks.

CHASSIS

Current Product	Recommended Product
WS-C6503	WS-C6503-E
	WS-C6504-E
WS-C6506	WS-C6506-E
WS-C6509	WS-C6509-E
WS-C6509-NEB	WS-C6509-NEB-A

POWER SUPPLIES

Current Product	Recommended Product
WS-CAC-1000W	WS-CAC-3000W
WS-CAC-1300W	WS-CAC-3000W
WS-CAC-2500W	WS-CAC-3000W
	WS-CAC-6000W
WS-CAC-4000W-US	WS-CAC-6000W
WS-CAC-4000W-INT	WS-CAC-6000W

Product Transitions *continued***SUPERVISORS**

Current Product	Recommended Product
WS-X6K-SUP1A-2GE	WS-SUP32-GE-3B WS-SUP32-10GE-3B
WS-X6K-SUP1A-PFC	WS-SUP32-GE-3B WS-SUP32-10GE-3B
WS-X6K-S1A-MSFC2	WS-SUP32-GE-3B WS-SUP32-10GE-3B WS-SUP720 WS-SUP720-3B WS-SUP720-3BXL
WS-X6K-S2-PFC2	WS-SUP32-GE-3B WS-SUP32-10GE-3B
WS-X6K-S2-MSFC2	WS-SUP720 WS-SUP720-3B WS-SUP720-3BXL
WS-X6K-S2U-MSFC2	WS-SUP720 WS-SUP720-3B WS-SUP720-3BXL

LINE CARDS

Current Product	Recommended Product
WS-X6348-RJ-45	WS-X6148A-RJ-45
WS-X6148-RJ-45	WS-X6148A-RJ-45
WS-X6348-RJ45V	WS-X6148A-45AF
WS-X6148-RJ45V	WS-X6148A-45AF
WS-X6148-45AF	WS-X6148A-45AF
WS-X6148-GE-TX	WS-X6148A-GE-TX
WS-X6148V-GE-TX	WS-X6148A-GE-45AF
WS-X6148-GE-45AF	WS-X6148A-GE-45AF
WS-X6516-GBIC	WS-X6516A-GBIC

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>

Notes



Cisco Catalyst 4500 Series

Modular switches with Layer 2–4 intelligent network services offer enterprises, small- to medium-sized businesses, and service providers added investment protection.

The Catalyst 4500 Series switches are mid-range, medium-density modular chassis delivering robust Layer 2–4 intelligent services. The modular architecture, media flexibility, and expandability of the Cisco Catalyst 4500 Series extends deployment life, while reducing the cost of ownership by minimizing recurring operational expenses and improving return on investment.

Cisco Catalyst 4500 Series switches extend control to the network edge with intelligent network services, including sophisticated quality of service (QoS), predictable performance, advanced security, and comprehensive management. This series delivers advanced control with integrated resiliency in both hardware and software. This minimizes network downtime and helps to ensure workforce productivity, profitability, and customer success.

The Cisco Catalyst 4500 Series includes four chassis: the Catalyst 4510R (10 slots), the Catalyst 4507R (seven slots), Catalyst 4506 (six slots), and Catalyst 4503 (three slots), with a choice of supervisor engines delivering up to 136 Gbps of Layer 2–4 switching. The series supports an extensive set of line cards, providing up to 384 10/100 or 10/100/1000 ports with integrated PoE. The series also supports 10 Gigabit Ethernet uplink ports for high-density Gigabit Ethernet-to-the-desk deployments and switch-to-switch applications.

Hardware Features: Catalyst 4500 Chassis

Chassis	WS-C4503	WS-C4506	WS-C4507R	WS-C4510R
Slots	3	6	7	10
Redundant Supervisor Option	no	no	yes	yes
Gigabit Ethernet GBIC/SFP density	104	240	240	384
10 GbE X2 port density	2	2	2	2
10/100/1000 density	108	240	240	384
10/100 density	108	240	240	384
100BASE-FX, LX-10, BX-D density	96	240	240	384
Max. watt power consumption (redundant mode)				
AC Internal (redundant mode)	4,200	4,200	4,200	4,200
AC External with power shelf (redundant mode)	1,400 + power shelf = 7,500	1,400 + power shelf = 7,500	1,400 + power shelf = 7,500	1,400 + power shelf = 7,500
DC Internal (redundant mode)	1,400 + UPS = 7,500	1,400 + UPS = 7,500	1,400 + UPS = 7,500	1,400 + UPS = 7,500
Max. number of Class 3 devices (15.4W)				
Max. power supplies				
AC Internal (redundant mode)	108	240	240	270
AC External with power shelf (redundant mode)	108	240	240	364
DC Internal (redundant mode)	108	240	240	384
Dimension (H x W x D) inches	12.25 x 17.31 x 12.50	17.38 x 17.31 x 12.50	19.19 x 17.31 x 12.50	24.35 x 17.31 x 12.50
Dimension (H x W x D) centimeters	31.12 x 43.97 x 31.70	44.13 x 43.97 x 31.70	48.74 x 43.97 x 31.70	61.84 x 43.97 x 31.70
Rack Unit (RU)	7	10	11	14
Unit weight pounds (kilograms) (chassis only)	31.25 (14.18)	40.5 (18.37)	44.25 (20.07)	51.50 (23.36)

Hardware Features: Catalyst 4500 Supervisor Engines

Supervisor Engines	WS-X4516-10GE	WS-X4516	WS-X4515	WS-X4013+	WS-X4013+TS
Chassis supported	All	All	4503, 4506, 4507R	4503, 4506, 4507R	4503
Enhanced Layer 3 option	yes	yes	yes	no	no
Total bandwidth (Gbps)	136	96	64	64	64
Packets per second (Mpps)	102	72	48	48	48
CPU Mhz	800	400	333	266	266
NetFlow	included	option	option	no	no
Onboard memory (DRAM)	512MB	512MB	512MB	256MB	256MB

Series Spotlight

Scalable, Resilient Architecture

The modular architecture of the Cisco Catalyst 4500 Series provides the scalability and flexibility to eliminate the need for multiplatform deployments and minimizes maintenance expenses. Network downtime is minimized with redundant supervisor engine (subsecond failover) capability (Catalyst 4507R and Catalyst 4510R switches), software-based fault tolerance, redundant fans, and 1+1 power-supply redundancy across the Cisco Catalyst 4500 Series. The scalable architecture allows for easy upgrade of all system ports to higher-layer switching functions by simply adding a new supervisor engine such as the Cisco Catalyst 4500 Series Supervisor Engines II-Plus, IV, V or V-10 GbE. Higher-layer functional enhancements such as NetFlow or Dynamic Buffer Limiting are possible on all system ports without replacing existing line cards and wiring.

Wire-speed Performance with all Services Enabled

The Cisco Catalyst 4500 Series offers up to 102 million packets per second (mpps) wire-speed forwarding rate in hardware for Layer 2–4 traffic. Switching performance is independent of the number of route entries or advanced Layer 3 services enabled. This ensures exceptional performance on applications which are jitter and latency sensitive.

Product Overview

CATALYST 4500—BASE CONFIGURATION

Product Number	Description
WS-C4503	3-slot chassis, fan, no power supply
WS-C4506	6-slot chassis, fan, no power supply
WS-C4507R	7-slot chassis, fan, no power supply, redundant-supervisor support
WS-C4510R	10-slot chassis, fan, no power supply, redundant-supervisor support

CATALYST 4x00 SUPERVISOR ENGINES

Product Number	Description
WS-X4013+	Catalyst 4500 Supervisor II-Plus (IOS), 2 GbE, Console (RJ-45)
WS-X4013+TS	Catalyst 4503 Supervisor II-Plus-TS, 12 10/100/1000 PoE + 8 SFP slots
WS-X4515	Catalyst 4500 Supervisor IV (2 GbE), Console (RJ-45)
WS-X4516	Catalyst 4500 Supervisor V (2 GbE), Console (RJ-45)
WS-X4516-10GE	Catalyst 4500 Supervisor V-10 GbE, 2x10 GbE (X2) or 4x1 GbE (SFP)
WS-F4531	Catalyst 4500 NetFlow services card
S45ES-12xxxx	Catalyst 4500 Enterprise Services Software
S45EK9-12xxxx	Catalyst 4500 Enterprise Services Software with 3DES

CATALYST 4x00 MODULES

Product Number	Description
WS-X4124-FX-MT	Catalyst 4500 FE Switching module, 24-port 100FX (MTRJ)
WS-X4148-FE-BD-LC	Catalyst 4500 FE module, 48-port BX-D (LC) (1550)
WS-X4148-FE-LX-MT	Catalyst 4500 FE module, 48-port 100LX-10 SMF (MTRJ)
WS-X4148-FX-MT	Catalyst 4500 FE Switching module, 48-port 100FX MMF (MTRJ)
WS-X4124-RJ45	Catalyst 4500 10/100 module, 24 ports (RJ-45)
WS-X4148-RJ	Catalyst 4500 10/100 Auto module, 48 ports (RJ-45)
WS-X4224-RJ45V	Catalyst 4500 10/100 PoE 802.3af 24 ports (RJ-45)
WS-X4148-RJ21	Catalyst 4500 10/100 module, 48-port Telco (4xRJ21)
WS-X4148-RJ45V	Catalyst 4500 pre-standard PoE 10/100, 48 ports (RJ-45)
WS-X4248-RJ21V	Catalyst 4500 PoE 802.3af 10/100, 48 ports (RJ-21)
WS-X4248-RJ45V	Catalyst 4500 PoE 802.3af 10/100, 48 ports (RJ-45)
WS-X4232-GB-RJ	Catalyst 4500 32-10/100 (RJ-45), 2 GbE (GBIC)
WS-X4232-RJ-XX	Catalyst 4500 10/100 module, 32 ports (RJ-45) + modular uplinks
WS-X4424-GB-RJ45	Catalyst 4500 24-port 10/100/1000 module (RJ-45)

Product Overview continued

CATALYST 4x00 MODULES continued

Product Number	Description
WS-X4306-GB	Catalyst 4500 GbE module, 6 ports (GBIC)
WS-X4506-GB-T	Catalyst 4500 6-port 10/100/1000 PoE or SFP (optional)
WS-X4302-GB	Catalyst 4500 GbE module, 2 ports (GBIC)
WS-X4418-GB	Catalyst 4500 GbE module, Server Switching 18 ports (GBIC)
WS-X4448-GB-RJ45	Catalyst 4500 48-port 10/100/1000 module (RJ-45)
WS-X4448-GB-SFP	Catalyst 4500 48-port 1000BASE-X (SFPs optional)
WS-X4524-GB-RJ45V	Catalyst 4500 PoE 802.3af 10/100/1000 24 ports (RJ-45)
WS-X4548-GB-RJ45	Catalyst 4500 Enhanced 48-port 10/100/1000 BASE-T (RJ-45)
WS-X4548-GB-RJ45V	Catalyst 4500 PoE 802.3af 10/100/1000, 48 ports (RJ-45)

CATALYST 4500—POWER SUPPLIES

Product Number	Description
PWR-C45-4200ACV	Catalyst 4500 4200W AC dual input power supply (Data + PoE)
PWR-C45-4200ACV/2	Catalyst 4500 4200W AC dual input power supply (Data + PoE)
PWR-C45-2800ACV	Catalyst 4500 2800W AC power supply (Data + PoE)
PWR-C45-2800ACV/2	Catalyst 4500 2800W AC power supply (Data + PoE)
PWR-C45-1400AC	Catalyst 4500 1400W AC power supply (Data Only)
PWR-C45-1400AC/2	Catalyst 4500 1400W AC power supply redundant (Data Only)
PWR-C45-1400DC-P	Catalyst 4500 1400W DC power supply with Int. PEM
PWR-C45-1400DC-P/2	Catalyst 4500 1400W DC power supply redundant with Int. PEM
PWR-C45-1400DC	Catalyst 4500 1400W DC Triple Input SP power supply (Data Only)
PWR-C45-1400DC/2	Catalyst 4500 1400W DC Triple Input SP power supply (Data Only)
PWR-C45-1300ACV	Catalyst 4500 1300W AC power supply (Data + PoE)
PWR-C45-1300ACV/2	Catalyst 4500 1300W AC power supply (Data + PoE)
PWR-C45-1000AC	Catalyst 4500 1000W AC power supply (Data Only)
PWR-C45-1000AC/2	Catalyst 4500 1000W AC power supply redundant (Data Only)
WS-P4502-1PSU	Catalyst 4500 Aux. Power Shelf (2 slots), including one PWR-4502
PWR-4502	Catalyst 4500 Aux. Power Shelf redundant power supply

Product Transitions: C4000 to C4500

Cisco Catalyst 4500 Series switches and supervisors offer enhanced features providing users of Catalyst 4000 Series (End of Sale) models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C4003	WS-C4503
WS-C4006	WS-C4506
	WS-C4507R
	WS-C4510R

Transition Matrix Supervisors

WS-X4012	WS-X4013+
	WS-X4013+TS
	WS-X4515
WS-X4013	WS-X4013+
	WS-X4013+TS
	WS-X4515
WS-X4014	WS-X4515
	WS-X4516
	WS-X4516-10GE
WS-X4032-L3	WS-X4515
	WS-X4516
	WS-X4516-10GE

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>

Notes

Cisco Catalyst Fixed-Configuration Switches

The Cisco Catalyst family includes the industry's widest and most versatile selection of fixed-configuration switches, making it easy for customers to find the ideal platform for any deployment. Yet unlike point solutions, these switches share the feature-rich functionality of Cisco IOS software, providing a firm foundation for converged data, voice, and video services.

Cisco Catalyst 4900, 3750, 3560, 2960, 2950, 2940, and Catalyst Express 500 Series switches offer an array of connectivity options, from Fast Ethernet to 10 GbE. They range from small, standalone switches to stackable models that function as a single, scalable switching unit. And many models are available with a choice of software images, allowing customers to dictate the level of intelligent network services based on individual needs.



Cisco Catalyst 4900 Series

Fixed-configuration switches offering high-performance, rack-optimized server switching for organizations of all sizes.

The Cisco Catalyst 4900 Series is based on the proven hardware and software architecture of Cisco's 4500 Series modular switches, but is distinguished by a 1-RU design that is ideal for top-of-rack server aggregation. The Cisco Catalyst 4900 Series includes two Layer 2–4 fixed-configuration switches.

Cisco Catalyst 4948 switch offers 48 ports of wire-speed 10/100/1000BASE-T with four alternative wired ports that can accommodate optional 1000BASE-X Small Form-factor Pluggable (SFP) optics. Cisco Catalyst 4948-10GE switch offers 48 ports of wire-speed 10/100/1000BASE-T with two wire-speed 10 Gigabit Ethernet uplinks via optional 10 GbE (X2) optics. Both models provide exceptional reliability and serviceability, supporting optional internal AC or DC 1+1 hot-swappable power supplies and a hot-swappable fan tray with redundant fans.

These switches are available with either the IP Base Software image or the Enterprise Services Software image. The Enterprise Services Software additionally supports Shortest Path First (OSPF), Intermediate System-to-Intermediate System (IS-IS), Enhanced Interior Gateway Routing Protocol (EIGRP), and Border Gateway Protocol (BGP).

Hardware Features

	WS-C4948	WS-C4948-10GE
Forwarding bandwidth per box (Gbps)	96	136
Maximum stack members	0	0
Total bandwidth of stack (Gbps)	0	0
Packets per second per box (Mpps)	72	102
MAC addresses supported	32,768	55,000
Routes supported	32,000	32,000
Onboard memory (DRAM MB)	256	256
10 GbE density	0	2
Gigabit Ethernet GBIC/SFP density	4	0
10 GbE X2 port density	0	2
10/100/1000 density	48	48
10/100 density	0	0
100BASE-FX density	0	0
Max. watt power consumption	300	300
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0
AC/DC support	Yes	Yes
Dimensions (H x W x D) inches	1.71 x 17.3 x 16.1	1.71 x 17.3 x 16.1
Dimensions (H x W x D) centimeters	4.4 x 43.9 x 40.9	4.4 x 43.9 x 40.9
Unit weight pounds (kilograms)	16.5 (7.48)	16.5 (7.48)

Series Spotlight

Wire-speed Performance

Cisco Catalyst 4900 Series delivers wire-speed throughput on all ports from 96 Gbps to 136 Gbps with low-latency for data-intensive applications. Switching performance is guaranteed regardless of the number of route entries or Layer 3 and 4 services enabled. The hardware-based Cisco Express Forwarding (CEF) routing architecture allows for increased scalability and performance.

Exceptional Reliability

Cisco Catalyst 4900 Series offers redundant hot-swappable internal AC or DC power supplies for nonstop operation. The 1 + 1 power supply design provides A-to-B failover when power supplies are connected to different circuits. AC and DC power supplies can be mixed in the same unit for maximum deployment flexibility. The Cisco Catalyst 4900 Series also features a hot-swappable fan tray with four redundant fans for additional serviceability and availability.

Product Overview

CATALYST 4948 SWITCH

Product Number	Description
WS-C4948-S	48 10/100/1000 ports + 4 SFP ports with 1 AC power supply; IP Base Image
WS-C4948-E	48 10/100/1000 ports + 4 SFP ports with 1 AC power supply; Enterprise Services Image
WS-C4948	48 10/100/1000 ports + 4 SFP ports with no power supply; optional Image
WS-C4948-10GE	48 10/100/1000 ports + 2 10 Gigabit Ethernet (X2) optic ports with no power supply; optional Image
WS-C4948-10GE-S	48 10/100/1000 ports + 2 10 Gigabit Ethernet (X2) optics ports with 1 AC power supply; IP Base Image
WS-C4948-10GE-E	48 10/100/1000 ports + 2 10 Gigabit Ethernet (X2) optics ports with 1 AC power supply; Enterprise Services Image

CATALYST 4948 POWER SUPPLIES

Product Number	Description
PWR-C49-300AC	Catalyst 4948 300W AC power supply
PWR-C49-300AC/2	Catalyst 4948 300W AC power supply (Redundant)
PWR-C49-300DC	Catalyst 4900 300W DC power supply
PWR-C49-300DC/2	Catalyst 4900 300W DC power supply (Redundant)

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>



Cisco Catalyst 3750 Series

Fixed-configuration switches offering multilayer switching and Cisco StackWise technology for enterprise branch offices and midsize organizations.

The Cisco Catalyst 3750 Series is an innovative line of multilayer Fast Ethernet and Gigabit Ethernet switches featuring Cisco StackWise™ technology, a 32 Gbps stack interconnect that allows customers to build a unified, highly resilient switching system—one switch at a time.

Up to nine Cisco Catalyst 3750 switches can be stacked in any combination, enabling organizations to mix and match to meet specific requirements. Additional 10/100, 10/100/100, 10 Gigabit Ethernet, and PoE connectivity can be deployed as necessary, offering a simple and cost-effective pay-as-you-go approach to network upgrades.

Cisco Catalyst 3750 switches can be purchased with the IP Base (formerly called SMI) or IP Services (formerly called EMI) licenses, and can be upgraded in the field to Advanced IP Services licenses. The IP Base license offers advanced QoS, rate-limiting, ACLs, and basic routing functionality. The IP Services license provides a richer set of enterprise-class features, including advanced hardware-based IP Unicast and IP Multicast routing as well as Policy-based Routing (PBR). The Advanced IP Services license adds IPv6 routing and advanced IP services.

Hardware Features

	WS-C3750-24TS	WS-C3750-48TS	WS-C3750-24PS	WS-C3750-48PS	WS-C3750-24FS	WS-C3750G-24T	WS-C3750G-24TS-1U	WS-C3750G-48TS	WS-C3750G-24PS	WS-C3750G-48PS
Forwarding bandwidth per box (Gbps)	32	32	32	32	32	32	32	32	32	32
Maximum stack members	9	9	9	9	9	9	9	9	9	9
Total bandwidth of stack (Gbps)	32	32	32	32	32	32	32	32	32	32
Packets per second per box (Mpps)	6.5	13.1	6.5	13.1	6.5	35.7	38.7	38.7	38.7	38.7
MAC addresses supported	12,000	12,000	12,000	12,000	12,000	12,000	12,000	12,000	12,000	12,000
Routes supported	11,000	11,000	11,000	11,000	11,000	11,000	11,000	11,000	11,000	11,000
Onboard memory (DRAM MB)	128	128	128	128	128	128	128	128	128	128
10 GbE density	0	0	0	0	0	0	0	0	0	0
Gigabit Ethernet GBIC/SFP density	2	4	2	4	2	0	4	4	4	4
10 GbE XENPAK/X2 port density	0	0	0	0	0	0	0	0	0	0
10/100/1000 density	0	0	0	0	0	24	24	48	24	48
10/100 density	24	48	24	48	0	0	0	0	0	0
100BASE-FX density	0	0	0	0	24	0	0	0	0	0
Max. watt power consumption	50	75	495	540	125	165	100	160	540	590
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	24	24	0	0	0	0	24	24
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	24	48	0	0	0	0	24	48
AC/DC support	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 11.8	1.73 x 17.5 x 11.8	1.73 x 17.5 x 11.8	1.73 x 17.5 x 14.9	1.73 x 17.5 x 11.8	1.73 x 17.5 x 12.8	1.73 x 17.5 x 14.9	1.73 x 17.5 x 16.1	1.73 x 17.5 x 14.9	1.73 x 17.5 x 16.1
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 30.1	4.4 x 44.5 x 30.1	4.4 x 44.5 x 30.1	4.4 x 44.5 x 37.8	4.4 x 44.5 x 30.1	4.4 x 44.5 x 32.6	4.4 x 44.5 x 37.8	4.4 x 44.5 x 40.9	4.4 x 44.5 x 37.8	4.4 x 44.5 x 40.9
Unit weight pounds (kilograms)	8 (3.6)	9.1 (4.1)	11.3 (5.1)	13.2 (6.0)	9.15 (4.15)	10 (4.6)	12 (5.5)	14 (6.4)	13.5 (6.1)	15.5 (7.0)

For further information on the Cisco Catalyst 3750 Metro Ethernet Series, go to:
<http://www.cisco.com/en/US/partner/products/hw/switches/ps5532/index.html>

Hardware Features continued

	WS-C3750G-12S	WS-C3750G-12S-SD	WS-C3750G-16TD
Forwarding bandwidth per box (Gbps)	32	32	32
Maximum stack members	9	9	9
Total bandwidth of stack (Gbps)	32	32	32
Packets per second per box (Mpps)	178	178	35.7
MAC addresses supported	12,000	12,000	12,000
Routes supported	20,000	20,000	11,000
Onboard memory (DRAM MB)	128	128	128
10 GbE density	0	0	1
Gigabit Ethernet GBIC/SFP density	12	12	0
10 GbE XENPAK/X2 port density	0	0	1
10/100/1000 density	0	0	16
10/100 density	0	0	0
100BASE-FX density	0	0	0
Max. watt power consumption	120	72	180
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	0
AC/DC support	AC only	DC only	AC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 12.8	1.73 x 17.5 x 12.8	1.73 x 17.5 x 16.1
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 32.6	4.4 x 44.5 x 32.6	4.4 x 44.5 x 40.9
Unit weight pounds (kilograms)	10 (4.6)	9 (4.08)	12.5 (5.7)

Series Spotlight

Cisco StackWise Technology

A premium stacking architecture optimized for Gigabit Ethernet, this technology is designed to respond to additions, deletions, and redeployment while maintaining constant performance. It unites up to nine individual Cisco Catalyst 3750 switches into a single logical unit, using special interconnect cables and stacking software. The stack behaves as a single switching unit that is managed by a master switch elected from one of the member switches. The master switch automatically creates and updates all the switching and optional routing tables. A working stack can accept new members or delete old members without service interruption.

Addition of IP Communications

Cisco Catalyst 3750 Series PoE models support Cisco IP phones and Cisco Aironet® wireless LAN (WLAN) access points, as well as any IEEE 802.3af-compliant end device. The Catalyst 3750 24-port models can support 24 simultaneous full-powered PoE ports at 15.4 watts (W) for maximum powered device support. The 48-port versions can deliver the necessary power to support 24 ports at 15.4W, 48 ports at 7.3W, or any combination in between.

Product Overview

CATALYST 3750 SERIES 10/100/1000, GbE, 10 GbE WORKGROUP SWITCH

Product Number	Description
WS-C3750G-24T-S	24 10/100/1000T ports; IP Base Image
WS-C3750G-24T-E	24 10/100/1000T ports; IP Services Image
WS-C3750G-24TS-S1U	24 10/100/1000 ports + 4 SFP ports; IP Base Image; 1RU
WS-C3750G-24TS-E1U	24 10/100/1000 ports + 4 SFP ports; IP Services Image; 1RU
WS-C3750G-24PS-S	24 10/100/1000T PoE ports + 4 SFP ports; IP Base Image
WS-C3750G-24PS-E	24 10/100/1000T PoE ports + 4 SFP ports; IP Services Image
WS-C3750G-48TS-S	48 10/100/1000T ports + 4 SFP ports; IP Base Image
WS-C3750G-48TS-E	48 10/100/1000T ports + 4 SFP ports; IP Services Image
WS-C3750G-48PS-S	48 10/100/1000T PoE ports + 4 SFP ports; IP Base Image
WS-C3750G-48PS-E	48 10/100/1000T PoE ports + 4 SFP ports; IP Services Image
WS-C3750G-16TD-S	16 10/100/1000BT ports + 1 10 GbE port (req. XENPAK); IP Base Image
WS-C3750G-16TD-E	16 10/100/1000BT ports + 1 10 GbE port (req. XENPAK); IP Services Image
WS-C3750G-12S-S	12 SFP ports; IP Base Image
WS-C3750G-12S-E	12 SFP ports; IP Services Image
WS-C3750G-12S-SD	12 SFP ports; IP Base Image; DC power supply

Product Overview continued

CATALYST 3750 SERIES 10/100 WORKGROUP SWITCHES

Product Number	Description
WS-C3750-24FS-S	24 100BASE-FX ports + 2 SFP ports; IP Base Image
WS-C3750-24PS-S	24 10/100 PoE ports + 2 SFP ports; IP Base Image
WS-C3750-24PS-E	24 10/100 PoE ports + 2 SFP ports; IP Services Image
WS-C3750-24TS-S	24 10/100 ports + 2 SFP ports; IP Base Image
WS-C3750-24TS-E	24 10/100 ports + 2 SFP ports; IP Services Image
WS-C3750-48PS-S	48 10/100 PoE ports + 4 SFP ports; IP Base Image
WS-C3750-48PS-E	48 10/100 PoE ports + 4 SFP ports; IP Services Image
WS-C3750-48TS-S	48 10/100 ports + 4 SFP ports; IP Base Image
WS-C3750-48TS-E	48 10/100 ports + 4 SFP ports; IP Services Image

CATALYST 3750 RIGHT ANGLE POWER CORDS

Product Number	Description
CAB-AC-RA=	Power Cord, Right Angle
CAB-AC-RA	Power Cord, 110V, Right Angle
CAB-ACR-RA=	Power Cord, Argentina, Right Angle
CAB-ACA-RA=	Power Cord, Australia, Right Angle
CAB-ACC-RA=	Power Cord, China, Right Angle
CAB-ACE-RA=	Power Cord, Europe, Right Angle
CAB-ACI-RA=	Power Cord, Italy, Right Angle
CAB-JPN-RA=	Power Cord, Japan, Right Angle
CAB-JPN-RA	Power Cord, Japan, Right Angle
CAB-ACS-RA=	Power Cord, Switzerland, Right Angle
CAB-ACU-RA=	Power Cord, United Kingdom, Right Angle

CATALYST 3750 RPS

Product Number	Description
PWR675-AC-RPS-N1=	675W redundant power supply with 1 connector cable
CAB-RPS-1614=	1 RPS 675 connector cable 16/14
CAB-16AWG-AC	AC power cord, 16AWG
CAB-16AWG-AC=	AC power cord, 16AWG

Product Overview continued

CATALYST 3750 METRO SERIES SWITCHES

Product Number	Description
ME-C3750-24TE-M	ME C3750 24 10/100+2SFP+2SFP ES Prt (no-pwr); Std ME SW Img

CATALYST 3750 METRO CONFIGURABLE POWER SUPPLIES

Product Number	Description
PWR-ME3750-AC	Configurable ME-C3750 AC power supply
PWR-ME3750-DC	Configurable ME-C3750 DC power supply
PWR-ME3750-AC-R	Metro Catalyst 3750 redundant AC power supply (configurable)
PWR-ME3750-DC-R	Metro Catalyst 3750 redundant DC power supply (configurable)

CATALYST 3750 METRO SPARE POWER SUPPLIES

Product Number	Description
PWR-ME3750-AC=	Metro Catalyst 3750 AC power supply (spare)
PWR-ME3750-DC=	Metro Catalyst 3750 DC power supply (spare)

Product Transitions: C3550/C3750 to C3560/C3750

Cisco Catalyst 3750 Series switches offer enhanced models within the same family. Among these enhancements are smaller form factors, increased memory, reduced power consumption, and improved MTBF.

Current Product	Recommended Product
WS-C3750G-24-TS-S	WS-C3750G-24-TS-S1U
WS-C3750G-24-TS-E	WS-C3750G-24-TS-E1U

Product Transitions: C3550/C3750 to C3560/C3750

Cisco Catalyst 3560 and Catalyst 3750 Series switches offer enhanced features providing users of Catalyst 3550 Series models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C3550-12G	WS-C3750G-12S-S
	WS-C3750G-12S-E
WS-C3550-12T	WS-C3750G-24T-S
	WS-C3750G-24T-E
	WS-C3750G-24TS-S1U
	WS-C3750G-24TS-E1U
	WS-C3560G-24TS-S
WS-C3550-24-SMI	WS-C3750-24TS-S
	WS-C3560-24TS-S
WS-C3550-24-EMI	WS-C3750-24TS-E
	WS-C3560-24TS-E
WS-C3550-24-FX-SMI	WS-C3750-24FS-S
WS-C3550-48-SMI	WS-C3750-48TS-S
	WS-C3560-48TS-S
WS-C3550-48-EMI	WS-C3750-48TS-E
	WS-C3560-48TS-E
WS-C3550-24PWR-SMI	WS-C3750-24PS-S
	WS-C3750-48PS-S
	WS-C3560-24PS-S
	WS-C3560-48PS-S
WS-C3550-24PWR-EMI	WS-C3750-24PS-E
	WS-C3750-48PS-E
	WS-C3560-24PS-E
	WS-C3560-48PS-E

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>

Notes



Cisco Catalyst 3560 Series

Fixed-configuration switches combining Gigabit Ethernet connectivity and PoE for small enterprise LAN access and branch office deployments.

The Cisco Catalyst 3560 Series combines multilayer Fast Ethernet and Gigabit Ethernet switching with integrated Power over Ethernet (PoE), simplifying the deployment of converged IP telephony, wireless access, video surveillance, and other new applications.

These standalone, fixed-configuration switches offer up to 48 10/100/1000 ports and support network-wide intelligent services such as advanced quality of service (QoS), rate limiting, access control lists (ACLs), multicast management, and high-performance IP routing.

Cisco Catalyst 3560 switches can be purchased with the IP Base (formerly called SMI) or IP Services (formerly called EMI) licenses, and can be upgraded in the field to Advanced IP Services licenses. The IP Base license offers advanced QoS, rate-limiting, ACLs, and basic routing functionality. The IP Services license provides a richer set of enterprise-class features, including advanced hardware-based IP Unicast and IP Multicast routing as well as Policy-based Routing (PBR). The Advanced IP Services license adds IPv6 routing.

Hardware Features

	WS-C3560-24TS	WS-C3560-48TS	WS-C3560-24PS	WS-C3560-48PS	WS-C3560G-24TS	WS-C3560G-48TS	WS-C3560G-24PS	WS-C3560G-48PS
Forwarding bandwidth per box (Gbps)	8.8	17.6	8.8	17.6	32	32	32	32
Maximum stack members	0	0	0	0	0	0	0	0
Total bandwidth of stack (Gbps)	0	0	0	0	0	0	0	0
Packets per second per box (Mpps)	6.5	13.1	6.5	13.1	38.7	38.7	38.7	38.7
MAC addresses supported	12,000	12,000	12,000	12,000	12,000	12,000	12,000	12,000
Routes supported	11,000	11,000	11,000	11,000	11,000	11,000	11,000	11,000
Onboard memory (DRAM MB)	128	128	128	128	128	128	128	128
10 GbE density	0	0	0	0	0	0	0	0
Gigabit Ethernet GBIC/SFP density	2	4	2	4	4	4	4	4
10 GbE XENPAK/X2 port density	0	0	0	0	0	0	0	0
10/100/1000 density	0	0	0	0	24	48	24	48
10/100 density	24	48	24	48	0	0	0	0
100BASE-FX density	0	0	0	0	0	0	0	0
Max. watt power consumption	45	65	485	530	100	160	540	590
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	24	24	0	0	24	24
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	24	48	0	0	24	48
AC/DC support	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 11.8	1.73 x 17.5 x 11.8	1.73 x 17.5 x 11.8	1.73 x 17.5 x 14.9	1.73 x 17.5 x 14.9	1.73 x 17.5 x 16.1	1.73 x 17.5 x 14.9	1.73 x 17.5 x 16.1
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 30.1	4.4 x 44.5 x 30.1	4.4 x 44.5 x 30.1	4.4 x 44.5 x 37.8	4.4 x 44.5 x 37.8	4.4 x 44.5 x 40.9	4.4 x 44.5 x 37.8	4.4 x 44.5 x 40.9
Unit weight pounds (kilograms)	8.5 (3.9)	9.1 (4.1)	11.3 (5.1)	13.2 (6.0)	12 (5.4)	13.5 (6.1)	14 (6.4)	15.5 (7.0)

Series Spotlight

Converged Services

The Cisco Catalyst 3560 Series includes switches that deliver Gigabit Ethernet speed with integrated PoE, supporting both Cisco pre-standard and IEEE 802.3af PoE devices. At speeds of 1000 Mbps, Gigabit Ethernet provides the bandwidth to meet new and evolving network demands, alleviate bottlenecks, and boost performance, while increasing the return on existing infrastructure investments. PoE removes the cost of extending wall power to each IP phone, wireless access point, or other PoE devices.

Integrated Security

With a wide range of security features, businesses can protect important information, keep unauthorized people off the network, prevent malicious viruses and worms from infecting the network, guard privacy, and maintain uninterrupted operation. Cisco Network Admission Control (NAC) helps implement network-wide security policies by validating the security posture of hosts seeking to connect to the network. Cisco Identity Based Network Services (IBNS) prevents unauthorized access and helps ensure that users get only their designated privileges. And features like DHCP Snooping, Dynamic ARP Inspection, and IP Source Guard help prevent against man-in-the-middle attacks.

Product Overview

CATALYST 3560 SERIES 10/100/1000 WORKGROUP SWITCHES

Product Number	Description
WS-C3560G-48PS-S	48 10/100/1000T PoE ports + 4 SFP ports; IP Base Image
WS-C3560G-48PS-E	48 10/100/1000T PoE ports + 4 SFP ports; IP Services Image
WS-C3560G-24PS-S	24 10/100/1000T PoE ports + 4 SFP ports; IP Base Image
WS-C3560G-24PS-E	24 10/100/1000T PoE ports + 4 SFP ports; IP Services Image
WS-C3560G-48TS-S	48 10/100/1000T ports + 4 SFP ports; IP Base Image
WS-C3560G-48TS-E	48 10/100/1000T ports + 4 SFP ports; IP Services Image
WS-C3560G-24TS-S	24 10/100/1000T ports + 4 SFP ports; IP Base Image
WS-C3560G-24TS-E	24 10/100/1000T ports + 4 SFP ports; IP Services Image

Product Overview continued

CATALYST 3560 SERIES 10/100 WORKGROUP SWITCHES

Product Number	Description
WS-C3560-48PS-S	48 10/100 PoE ports + 4 SFP ports; IP Base Image
WS-C3560-48PS-E	48 10/100 PoE ports + 4 SFP ports; IP Services Image
WS-C3560-24PS-S	24 10/100 PoE ports + 2 SFP ports; IP Base Image
WS-C3560-24PS-E	24 10/100 PoE ports + 2 SFP ports; IP Services Image
WS-C3560-48TS-S	48 10/100 ports + 4 SFP ports; IP Base Image
WS-C3560-48TS-E	48 10/100 ports + 4 SFP ports; IP Services Image
WS-C3560-24TS-S	24 10/100 ports + 2 SFP ports; IP Base Image
WS-C3560-24TS-E	24 10/100 ports + 2 SFP ports; IP Services Image

CATALYST 3560 RIGHT ANGLE POWER CORDS

Product Number	Description
CAB-AC-RA=	Power Cord, Right Angle
CAB-AC-RA	Power Cord, 110V, Right Angle
CAB-ACR-RA=	Power Cord, Argentina, Right Angle
CAB-ACA-RA=	Power Cord, Australia, Right Angle
CAB-ACC-RA=	Power Cord, China, Right Angle
CAB-ACE-RA=	Power Cord, Europe, Right Angle
CAB-ACI-RA=	Power Cord, Italy, Right Angle
CAB-JPN-RA=	Power Cord, Japan, Right Angle
CAB-JPN-RA	Power Cord, Japan, Right Angle
CAB-ACS-RA=	Power Cord, Switzerland, Right Angle
CAB-ACU-RA=	Power Cord, United Kingdom, Right Angle

CATALYST 3560 RPS

Product Number	Description
PWR675-AC-RPS-N1=	675W redundant power supply with 1 connector cable
CAB-RPS-1614=	1 RPS 675 connector cable 16/14

Product Transitions: C2970/C3550 to C3560/C3750

Cisco Catalyst 3560 and Catalyst 3750 Series switches offer enhanced features providing users of Catalyst 3550 Series (End of Sale) models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C3550-12G	WS-C3750G-12S-S
	WS-C3750G-12S-E
WS-C3550-12T	WS-C3750G-24T-S
	WS-C3750G-24T-E
	WS-C3750G-24TS-S1U
	WS-C3750G-24TS-E1U
WS-C3550-24-SMI	WS-C3560G-24TS-S
	WS-C3560G-24TS-E
	WS-C3750-24TS-S
WS-C3550-24-EMI	WS-C3560-24TS-S
	WS-C3750-24TS-E
WS-C3550-24-FX-SMI	WS-C3560-24TS-E
	WS-C3750-24FS-S
WS-C3550-48-SMI	WS-C3750-48TS-S
	WS-C3560-48TS-S
WS-C3550-48-EMI	WS-C3750-48TS-E
	WS-C3560-48TS-E
WS-C3550-24PWR-SMI	WS-C3750-24PS-S
	WS-C3750-48PS-S
	WS-C3560-24PS-S
WS-C3550-24PWR-EMI	WS-C3560-48PS-S
	WS-C3750-24PS-E
	WS-C3750-48PS-E
	WS-C3560-24PS-E
	WS-C3560-48PS-E

Product Transitions: C2970 to C2960/C3560

Cisco Catalyst 2960 and Catalyst 3560 Series switches offer enhanced features providing users of Catalyst 2970 Series models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C2970G-24T	WS-C2960G-24TC-L
WS-C2970G-24TS	WS-C2960G-24TC-L
WS-C2970G-24T	WS-C3560G-24TS-E
WS-C2970G-24TS	WS-C3560G-24TS-E

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>



Cisco Catalyst 2960 Series

Fixed-configuration switches offering Fast Ethernet and Gigabit Ethernet connectivity with enhanced LAN services for mid-market and branch office networks.

The new line of Cisco Catalyst 2960 Series switches combine Fast Ethernet and Gigabit Ethernet desktop connectivity with advanced intelligent services, enabling organizations to extend the operational benefits of increased security, availability, resiliency, and scalability to the network edge.

The Cisco Catalyst 2960 Series is available in the LAN Base software image. The LAN Base feature set includes a rich Layer 2+ suite of intelligent services, including advanced quality of service, rate limiting, and access control lists (ACLs). These switches are also equipped with a robust set of features that increase network scalability and availability. These include multicast filtering as well as a complete suite of Spanning Tree Protocol enhancements designed to maximize availability in a Layer 2 network.

The series includes three configurations featuring dual-purpose (alternative wired) uplinks for Gigabit Ethernet, allowing the network manager to use either a copper or a fiber uplink. Each dual-purpose uplink offers one 10/100/1000 port and one SFP-based port, with one active at a time. The series also includes a 24-port Gigabit Ethernet switch which drives cost-effective Gigabit to the Desktop (GTTD) across the network.

Hardware Features

	WS-C2960-24TC-L	WS-C2960-24TT-L	WS-C2960-48TC-L	WS-C2960-48TT-L	WS-C2960G-24TC-L
Forwarding bandwidth per box (Gbps)	8.8	8.8	13.6	13.6	32
Maximum stack members	0	0	0	0	0
Total bandwidth of stack (Gbps)	0	0	0	0	0
Packets per second per box (Mpps)	6.6	6.6	10.1	10.1	35.7
MAC addresses supported	8,000	8,000	8,000	8,000	8,000
Routes supported	0	0	0	0	0
Onboard memory (DRAM MB)	64	64	64	64	64
10 GbE density	0	0	0	0	0
Gigabit Ethernet GBIC/SFP density	2	0	2	0	4
10 GbE XENPAK/X2 port density	0	0	0	0	0
10/100/1000 density	2*	2	2*	2	24
10/100 density	24	24	48	48	0
100BASE-FX density	0	0	0	0	0
Max. watt power consumption	30	30	45	45	75
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	0	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	0	0	0
AC/DC support	AC only	AC only	AC only	AC only	AC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 9.3	1.73 x 17.5 x 9.3	1.73 x 17.5 x 9.3	1.73 x 17.5 x 9.3	1.73 x 17.5 x 12.9
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 23.6	4.4 x 44.5 x 23.6	4.4 x 44.5 x 23.6	4.4 x 44.5 x 23.6	4.4 x 44.5 x 32.8
Unit weight pounds (kilograms)	8 (3.6)	8 (3.6)	8 (3.6)	8 (3.6)	10 (4.5)

*Dual purpose uplinks, only one SFP port or one 10/100/1000 BT port is active at one time.

Series Spotlight

Gigabit Ethernet

At speeds of 1000 Mbps, Gigabit Ethernet provides the bandwidth to meet new and evolving network demands, alleviate bottlenecks, and boost performance while increasing the return on existing infrastructure investments. Today's workers are placing higher demands on networks by running multiple, concurrent applications. The Cisco Catalyst 2960 provides a means to intelligently scale the network beyond 100 Mbps over existing Category 5 copper cabling.

Enhanced Security

Security is delivered through a wide range of authentication methods, data encryption technologies, and Network Admission Control (NAC) based on users, ports, and MAC addresses. Through these features, the Catalyst 2960 offers security to protect users and devices from attack.

Product Overview

CATALYST 2960 SERIES WORKGROUP SWITCHES

Product Number	Description
WS-C2960-24TT-L	24 10/100 ports + 2 10/100/1000 uplinks; LAN Base Image
WS-C2960-48TT-L	48 10/100 ports + 2 10/100/1000 uplinks; LAN Base Image
WS-C2960-24TC-L	24 10/100 ports + 2 dual-purpose uplinks; LAN Base Image
WS-C2960-48TC-L	48 10/100 ports + 2 dual-purpose uplinks; LAN Base Image
WS-C2960G-24TC-L	20 10/100/1000 ports + 4 dual-purpose uplinks; LAN Base Image

Product Overview continued

CATALYST 2960 RIGHT ANGLE POWER CORDS

Product Number	Description
CAB-AC-RA=	Power Cord, Right Angle
CAB-AC-RA	Power Cord, 110V, Right Angle
CAB-ACR-RA=	Power Cord, Argentina, Right Angle
CAB-ACA-RA=	Power Cord, Australia, Right Angle
CAB-ACC-RA=	Power Cord, China, Right Angle
CAB-ACE-RA=	Power Cord, Europe, Right Angle
CAB-ACI-RA=	Power Cord, Italy, Right Angle
CAB-JPN-RA=	Power Cord, Japan, Right Angle
CAB-JPN-RA	Power Cord, Japan, Right Angle
CAB-ACS-RA=	Power Cord, Switzerland, Right Angle
CAB-ACU-RA=	Power Cord, United Kingdom, Right Angle

CATALYST 2960 RPS

Product Number	Description
PWR675-AC-RPS-N1=	675W redundant power supply with 1 connector cable
CAB-RPS-1614=	1 RPS 675 connector cable 16/14

Product Transitions: C2970 to C2960/C3560

Cisco Catalyst 2960 and Catalyst 3560 Series switches offer enhanced features providing users of Catalyst 2970 Series models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C2970G-24T	WS-C2960G-24TC-L
WS-C2970G-24TS	WS-C2960G-24TC-L
WS-C2970G-24T	WS-C3560G-24TS-E
WS-C2970G-24TS	WS-C3560G-24TS-E

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>



Cisco Catalyst 2950 Series

Fixed-configuration switches offering Fast Ethernet and Gigabit Ethernet connectivity for branch offices, small wiring closets, and industrial deployments.

The Cisco Catalyst 2950 Series switch is a fixed-configuration switch that provides wire-speed Fast Ethernet and Gigabit Ethernet connectivity. This switch offers two distinct sets of software features and a range of configurations to allow small, midsize, and enterprise branch offices and industrial environments to select the right combination for the network edge.

Standard Image Software (SI) offers Cisco IOS Software functions for basic data, voice, and video services. For networks with requirements for additional security, advanced quality of service (QoS), and high availability, Enhanced Image Software (EI) delivers intelligent services such as rate limiting and security filtering for deployment at the network edge.

By adding intelligent services to their networks, companies gain the availability required to accommodate time-critical needs, the scalability needed to accommodate growth, the advanced security essential to protecting confidential information, and the ability to differentiate and control traffic flows to optimize network operations.

Hardware Features

	WS-C2950-12	WS-C2950-24	WS-C2950-SX-24	WS-C2950SX-48-SI	WS-C2950-T24	WS-C2950-T48-SI	WS-C2950-C-24	WS-C2950G-12-EI	WS-C2950G-24-EI	WS-C2950G-24-EI-DC
Forwarding bandwidth per box (Gbps)	2.4	4.8	8.8	13.6	8.8	13.6	5.2	6.4	8.8	8.8
Maximum stack members	0	0	0	0	0	0	0	0	0	0
Total bandwidth of stack (Gbps)	0	0	0	0	0	0	0	0	0	0
Packets per second per box (Mpps)	1.8	3.6	6.6	10.1	6.6	10.1	3.9	4.8	6.6	6.6
MAC addresses supported	8,000	8,000	8,000	8,000	8,000	8,000	8,000	8,000	8,000	8,000
Routes supported	0	0	0	0	0	0	0	0	0	0
Onboard memory (DRAM MB)	16	16	16	32	16	32	16	16	16	16
10 GbE density	0	0	0	0	0	0	0	0	0	0
Gigabit Ethernet GBIC density	0	0	0	0	0	0	0	2	2	2
10 GbE XENPAK/X2 port density	0	0	0	0	0	0	0	0	0	0
10/100/1000 density	0	0	2 (1000BASE-SX)	2 (1000BASE-SX)	2	2	0	0	0	0
10/100 density	12	24	24	48	24	48	24	12	24	24
100BASE-FX density	0	0	0	0	0	0	2	0	0	0
Max. watt power consumption	30	30	30	45	30	45	30	30	30	30
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	0	0	0	0	0	0	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	0	0	0	0	0	0	0	0
AC/DC support	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only	AC only	DC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 9.52	1.73 x 17.5 x 9.52	1.73 x 17.5 x 9.52	1.73 x 17.5 x 13	1.73 x 17.5 x 9.52	1.73 x 17.5 x 13	1.73 x 17.5 x 9.52	1.73 x 17.5 x 9.52	1.73 x 17.5 x 9.52	1.73 x 17.5 x 9.52
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 24.18	4.4 x 44.5 x 24.18	4.4 x 44.5 x 24.18	4.4 x 44.5 x 33.02	4.4 x 44.5 x 24.18	4.4 x 44.5 x 33.02	4.4 x 44.5 x 24.18	4.4 x 44.5 x 24.18	4.4 x 44.5 x 24.18	4.4 x 44.5 x 24.18
Unit weight pounds (kilograms)	6.5 (3.0)	6.5 (3.0)	6.5 (3.0)	10 (4.5)	6.5 (3.0)	10 (4.5)	6.5 (3.0)	6.5 (3.0)	6.5 (3.0)	6.5 (3.0)

Hardware Features continued

	WS-C2950G-48-EI	WS-C2955S-12	WS-C2955C-12	WS-C2955T-12
Forwarding bandwidth per box (Gbps)	13.6	2.8	2.8	6.4
Maximum stack members	0	0	0	0
Total bandwidth of stack (Gbps)	0	0	0	0
Packets per second per box (Mpps)	10.1	2	2	4.8
MAC addresses supported	8,000	8,000	8,000	8,000
Routes supported	0	0	0	0
Onboard memory (DRAM MB)	16	32	32	32
10 GbE density	0	0	0	0
Gigabit Ethernet GBIC density	2	0	0	0
10 Gigabit Ethernet XENPAK/X2 port density	0	0	0	0
10/100/1000 density	0	0	0	2
10/100 density	48	12	12	12
100BASE-FX density	0	0	2	0
Max. watt power consumption	45	23	23	23
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0	0	0
AC/DC support	AC only			
Dimensions (H x W x D) inches	1.73 x 17.5 x 13	3.78 x 8.07 x 5.03	3.78 x 8.07 x 5.03	3.78 x 8.07 x 5.03
Dimensions (H x W x D) centimeters	4.4 x 44.5 x 33.02	9.60 x 20.5 x 12.78	9.60 x 20.5 x 12.78	9.60 x 20.5 x 12.78
Unit weight pounds (kilograms)	10 (4.5)	3 (1.4)	3 (1.4)	3 (1.4)

Series Spotlight

Simplified Management

Like many other Cisco fixed-configuration switches, Cisco 2950 Series switches feature embedded Graphical User Interface (GUI)-based Device Manager, enabling network managers to quickly and easily configure their switches. With Cisco Network Assistant, a PC-based software application, customers can also simultaneously configure and troubleshoot multiple Cisco Catalyst switches using a standard Web browser. Cisco Network Assistant provides configuration wizards that greatly simplify the implementation of converged networks and intelligent network services.

Specialized Models

The Cisco Catalyst 2950 Series includes special models that extend intelligent Ethernet services to far-flung locations and harsh environments. Cisco Catalyst 2955 switches feature industrial-grade components designed to withstand extreme vibrations, shocks, and temperatures (-40° to 140° F), enabling manufacturers to extend Ethernet to the factory floor to improve communication and increase productivity.

Product Overview

CATALYST 2950 WORKGROUP SWITCHES

Product Number	Description
WS-C2950-12	12 10/100 ports; Standard Image
WS-C2950-24	24 10/100 ports; Standard Image
WS-C2950C-24	24 10/100 ports + 2 100BASE-FX uplinks; Enhanced Image
WS-C2950G-12-EI	12 10/100 ports + 2 GBIC slots; Enhanced Image
WS-C2950G-24-EI	24 10/100 ports + 2 GBIC slots; Enhanced Image
WS-C2950G-24-EI-DC	24 10/100 ports + 2 GBIC slots; Enhanced Image; DC version
WS-C2950G-48-EI	48 10/100 ports + 2 GBIC slots; Enhanced Image
WS-C2950SX-24	24 10/100 ports + 2 1000BASE-SX ports; Standard Image
WS-C2950SX-48-SI	48 10/100 ports + 2 1000BASE-SX uplink ports; Standard Image
WS-C2950T-24	24 10/100 ports + 2 10/100/1000BASE-T ports; Enhanced Image
WS-C2950T-48-SI	48 10/100 ports + 2 10/100/1000BASE-T uplinks; Standard Image
WS-C2955C-12	2955 12 TX ports + 2 multimode uplinks
WS-C2955S-12	2955 12 TX + 2 single-mode uplinks
WS-C2955T-12	2955 12 TX ports + 2 copper uplinks

Product Overview *continued***CATALYST 2950 — POWER OPTIONS**

Product Number	Description
PWR-2955-AC=	AC to 24 V DC DIN rail power brick

CATALYST 2950 — REDUNDANT POWER SUPPLIES

Product Number	Description
PWR675-AC-RPS-N1=	675W redundant power supply with 1 connector cable
CAB-RPS-1614=	1 RPS 675 connector cable 16/14

CATALYST 2950 — GBIC CABLE

Product Number	Description
WS-X3500-XL	GigaStack Stacking GBIC and 50 cm cable

Product Transitions: C2950 to C2960

Cisco Catalyst 2960 Series switches offer enhanced features providing users of Catalyst 2950 Series models a direct transition solution that integrates seamlessly into existing networks.

Current Product	Recommended Product
WS-C2950G-12-EI	WS-C2960-24TC-L
WS-C2950G-24-EI	WS-C2960-24TC-L
WS-2C2950G-48-EI	WS-C2960-48TC-L
WS-C2950T-24	WS-C2960-24TT-L
WS-C2950T-48-SI	WS-C2960-48TT-L

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>

Notes



Cisco Catalyst 2940 Series

Compact fixed-configuration switches delivering Fast Ethernet connectivity for workgroup, conference room, and classroom deployments.

Cisco Catalyst 2940 Series switches are small, standalone, managed switches with eight Fast Ethernet ports and a single integrated Fast Ethernet or Gigabit Ethernet uplink. These switches are designed for deployments outside the wiring closet in the end-user workspace, such as classrooms or conference rooms.

They feature a durable metal shell, no fan for silent operation, a magnet for easy wall or under-the-desk mounting, a security lock slot to prevent theft, and an available cable guard to lock down cables and help prevent theft. The Cisco Catalyst 2940 runs Cisco IOS Software with comprehensive security and manageability, delivering network intelligence all of the way to the network edge.

Easy to install and manage, built to last, and receiving periodic software updates for life, these switches provide outstanding investment protection and the lowest total cost of ownership in their product class.

Hardware Features

	WS-C2940-8TT-S	WS-C2940-8TF-S
Forwarding bandwidth per box (Gbps)	3.6	3.6
Maximum stack members	0	0
Total bandwidth of stack (Gbps)	0	0
Packets per second per box (Mpps)	2.7	2.7
MAC addresses supported	8,000	8,000
Routes supported	0	0
Onboard memory (DRAM MB)	16	16
10 GbE density	0	0
Gigabit Ethernet GBIC/SFP density	0	1
10 GbE XENPAK/X2 port density	0	0
10/100/1000 density	0	0
10/100 density	8	8
100BASE-FX density	0	1
Max. watt power consumption	15	15
PoE: Max. 802.3af Class 3 devices (15.4W)	0	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	0
AC/DC support	AC only	AC only
Dimensions (H x W x D) inches	1.55 x 10.6 x 6.42	1.55 x 10.6 x 6.42
Dimensions (H x W x D) centimeters	3.94 x 26.9 x 16.3	3.94 x 26.9 x 16.3
Unit weight pounds (kilograms)	3 (1.36)	3 (1.36)

Series Spotlight

Comprehensive Management

The Cisco Catalyst 2940 Series has robust SNMP Management Information Base (MIB) support and is fully manageable by the CiscoWorks suite of network management tools. The Catalyst 2940 Series feature an embedded Graphical User Interface (GUI)-based Device Manager, enabling network managers to quickly and easily configure their switches. With Cisco Network

Assistant, a PC-based software application, customers can also simultaneously configure and troubleshoot multiple Cisco Catalyst switches using a standard Web browser. Cisco Network Assistant provides configuration wizards that greatly simplify the implementation of converged networks and intelligent network services.

Series Spotlight continued

Investment Protection

In contrast to low-end unmanaged switches that often have high failure rates and do not stay current with new technologies, Cisco Catalyst 2940 Series switches are engineered for long-term value. A durable all-metal shell, an exceptionally high meantime between failure (MTBF) of over 70 years, and a Limited Lifetime Warranty

all help to ensure that this switch will outlast most deployment time frames.

Customers also receive free major software updates for the life of the switch, enabling them to benefit from new functionality as networking standards and technology evolve.

Finally, the switches provide a smooth migration to Gigabit Ethernet uplinks.

Product Overview

CATALYST 2940 SERIES WORKGROUP SWITCHES

Product Number	Description
WS-C2940-8TF-S	8 10/100 ports + 1 100BASE-FX port
WS-C2940-8TT-S	8 10/100 ports + 1 10/100/1000 port

CATALYST 2940 SPARE RIGHT ANGLE POWER CORDS

Product Number	Description
CAB-AC-RA=	Power Cord, Right Angle
CAB-AC-RA	Power Cord, 110V, Right Angle
CAB-ACR-RA=	Power Cord, Argentina, Right Angle
CAB-ACA-RA=	Power Cord, Australia, Right Angle
CAB-ACC-RA=	Power Cord, China, Right Angle
CAB-ACE-RA=	Power Cord, Europe, Right Angle
CAB-ACI-RA=	Power Cord, Italy, Right Angle
CAB-JPN-RA=	Power Cord, Japan, Right Angle
CAB-JPN-RA	Power Cord, Japan, Right Angle
CAB-ACS-RA=	Power Cord, Switzerland, Right Angle
CAB-ACU-RA=	Power Cord, United Kingdom, Right Angle

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>



Cisco Catalyst Express 500 Series

Cisco-class switches that make advanced network services and IP Communications easy to manage for businesses from 20 to 250 employees.

This new series of Layer 2 managed Fast Ethernet and Gigabit Ethernet switches offers nonblocking, wire-speed performance that provides a secure network foundation optimized for data, wireless, and voice. Built-in advanced security features help ensure that all devices on the network are protected.

An intuitive GUI simplifies setting up, running, and troubleshooting a network. With Cisco Smartports technology, mission-critical traffic is prioritized, voice conversations are clear, bandwidth-intensive video traffic does not impact other applications on the network, and your wireless network is secure. Integrated intelligence helps detect device and network problems before they impact your business.

The Cisco Catalyst Express 500 Series switches also offer Power over Ethernet (PoE), reducing the cost and complexity of IP Communications and wireless LAN deployments by supplying power and Ethernet connectivity over the same Category 5 cables. This eliminates the need to provide separate power outlets and cables for wireless access points, closed-circuit TV cameras, and IP phones.

Hardware Features

	WS-CE500-24TT	WS-CE500-24LC	WS-CE500-24PC	WS-CE500G-12TC
Forwarding bandwidth per box (Gbps)	8.8	8.8	8.8	24
Maximum stack members	0	0	0	0
Total bandwidth of stack (Gbps)	0	0	0	0
Packets per second per box (Mpps)	6.6	6.6	6.6	18
MAC addresses supported	8,000	8,000	8,000	8,000
Routes supported	0	0	0	0
Onboard memory (DRAM MB)	32	32	32	32
10 GbE density	0	0	0	0
Gigabit Ethernet GBIC/SFP density	0	2*	2*	4*
10 GbE XENPAK/X2 port density	0	0	0	0
10/100/1000 density	2	2*	2*	12
10/100 density	24	24	24	0
100BASE-FX density	0	0	0	0
Max. watt power consumption	30	45	90	45
PoE: Max. 802.3af Class 3 devices (15.4W)	0	4	24	0
PoE: Max. 802.3af Class 2 devices (7.3W)	0	4	24	0
AC/DC support	AC only	AC only	AC only	AC only
Dimensions (H x W x D) inches	1.73 x 17.5 x 9.9	1.73 x 17.5 x 9.9	1.73 x 17.5 x 14.4	1.73 x 17.5 x 9.9
Dimensions (H x W x D) centimeters	4.39 x 44.45 x 25.15	4.39 x 44.45 x 25.15	4.39 x 44.45 x 36.58	4.39 x 44.45 x 25.15
Unit weight pounds (kilograms)	8 (3.7)	8 (3.7)	12 (5.5)	8 (3.7)

*Dual purpose uplinks, only one SFP port or one 10/100/1000 BT port is active at one time.

Series Spotlight

Simplified Deployments

The Cisco Catalyst Express 500 Series switches are designed for ease of use. The switch is initialized through the GUI device manager—no console cable or terminal emulation application is needed. Integrated intelligence optimizes the switch at the system level. Optimal configuration for each port can be applied by choosing from 10 preset Cisco Smartports roles. All ports support autonegotiation of port speed and duplex, and all PoE ports can supply up to the IEEE standard maximum of 15.4W simultaneously.

Integrated Security

The Cisco Catalyst Express 500 Series offers several layers of security to protect your network, including a choice of three business-optimized levels. Management traffic to and from the GUI device manager can be encrypted with Secure Sockets Layer (SSL). Tight integration with Cisco wireless access points allows businesses to quickly and easily deploy a secure wireless LAN network. With the Cisco Self-Defending Network strategy and Cisco Clean Access solutions, the Cisco Catalyst Express 500 Series raises antivirus and overall security protection to the next level.

Product Overview

CATALYST EXPRESS 500 10/100/1000 SWITCHES

Product Number	Description
WS-CE500-24TT	24 10/100 ports + 2 10/100/1000BASE-T ports
WS-CE500-24LC	20 10/100 ports + 4 10/100 ports with PoE + 2 10/100/1000BASE-T or SFP ports
WS-CE500-24PC	24 10/100 ports with PoE + 2 10/100/1000BASE-T or SFP ports
WS-CE500G-12TC	8 10/100/1000BASE-T ports + 4 10/100/1000BASE-T or SFP ports

CATALYST EXPRESS 500 RIGHT ANGLE POWER CORDS

Product Number	Description
CAB-AC-RA=	Power Cord, Right Angle
CAB-AC-RA	Power Cord, 110V, Right Angle
CAB-ACR-RA=	Power Cord, Argentina, Right Angle
CAB-ACA-RA=	Power Cord, Australia, Right Angle
CAB-ACC-RA=	Power Cord, China, Right Angle
CAB-ACE-RA=	Power Cord, Europe, Right Angle
CAB-ACI-RA=	Power Cord, Italy, Right Angle
CAB-JPN-RA=	Power Cord, Japan, Right Angle
CAB-JPN-RA	Power Cord, Japan, Right Angle
CAB-ACS-RA=	Power Cord, Switzerland, Right Angle
CAB-ACU-RA=	Power Cord, United Kingdom, Right Angle

Product Overview continued

CATALYST EXPRESS 500 RPS

Product Number	Description
PWR675-AC-RPS-N1=	675W Redundant power supply with 1 connector cable
CAB-RPS-1614=	1 RPS 675 connector cable 16/14

For more product information on Cisco Catalyst Switches, go to:
<http://www.cisco.com/en/US/products/hw/switches/index.html>

For more product ordering information, go to:
<http://www.cisco.com/cgi-bin/front.x/pricing?Request=Home>

Notes

Cisco Optics

Cisco offers a wide variety of pluggable transceiver modules across Cisco switches and router platforms. Cisco pluggable transceivers provide a convenient and cost-effective solution for the adoption of Fast Ethernet, Gigabit Ethernet, and 10 Gigabit Ethernet in data center, campus, metro access, and storage area networks.



Cisco 10 Gigabit Modules

Cisco offers a range of XENPAK, X2, and XFP modules for 10 Gigabit Ethernet deployments. These Cisco transceivers meet Cisco specifications and are compliant with industry standards. Cisco XENPAK, X2, and XFP offer a convenient and cost-effective solution for the adoption of 10 Gigabit Ethernet in data center, campus, metropolitan area access, and ring networks. XENPAKs are offered for several reaches and transmission media and are supported on the Catalyst 6500, 3750 Series switches, and 7600 and CRS-1 routers today. X2s are also offered for several reaches and transmission media and are supported on the Catalyst 4500 and 4948-10GE Series switches today. The Cisco XFP Module offers customers a dual rate interface for 10 Gigabit Ethernet and Packet-over-SONET/SDH (POS) connectivity. XFPs are currently supported on Cisco routers based on Shared Port Adapter (SPA).



Cisco Gigabit Ethernet SFP Modules

Cisco offers a range of GBIC transceivers and Small Form-factor Pluggable (SFP) transceivers for Gigabit Ethernet and Fibre Channel applications. These small, modular optical interface transceivers offer a convenient and cost-effective solution for the adoption of Gigabit Ethernet and Fibre Channel in data center, campus, metropolitan area access and ring networks, and storage area networks.



Cisco Fast Ethernet SFP Modules

Cisco offers a range of Fast Ethernet SFP Interface Transceivers. The product portfolio includes 100BASE-FX, 100BASE-LX, and 100BASE-BX SFPs.

- 100BASE-FX: SFP operates on ordinary multimode fiber optic link spans of up to 2 km in length.
- 100BASE-LX: SFP operates on ordinary single-mode fiber optic link spans of up to 10 km in length.
- 100BASE-BX: SFP operates on ordinary single-mode SINGLE STRAND fiber optic link spans of up to 10 km in length. A 100BASE-BX-D and a 100BASE-BX-U SFP is needed for the single strand deployment.

Cisco offers two types of 100M SFP:

- 100M SFP for Fast Ethernet (FE) SFP Port. The SFP product name contains a "FE".
- 100M SFP for Gigabit Ethernet (GbE) SFP Port. The SFP product name contains a "GE".



Cisco CWDM Modules

Cisco Course Wave Division Multiplexing (CWDM) Solution allows scalable and easy-to-deploy Gigabit Ethernet (GbE) and Fibre Channel services. The combination of CWDM GBICs and CWDM SFPs and CWDM Optical Add-Drop Modules (OADMs) and Multiplexers enables the design of a flexible and highly available multiservice network. The Cisco CWDM Solution offers a convenient and cost-effective solution for the adoption of optical Gigabit Ethernet in campus, data center, and metropolitan-area access networks.

Cisco CWDM Solution consists of a set of eight different Cisco CWDM GBICs (one for each of the eight different colors or wavelengths), eight different SFPs, a set of eight single wavelength/dual channel OADMs, two four-channel OADM/MUX and an eight-channel MUX along with a CWDM rack-mountable chassis.



Cisco DWDM Transceiver Modules

The Cisco Dense Wave Division Multiplexing (DWDM) XENPAKs allow users to integrate WDM transport directly with Cisco 10 Gigabit Ethernet switches and routers. The DWDM XENPAKs and DWDM optical filter and amplifier products (Cisco ONS15216 series) enable the design of a flexible and highly available multiservice network. The DWDM XENPAKs support 100GHZ ITU grid and match the 4-skip-1 channel plan of Cisco ONS 100GHZ products. The DWDM XENPAKs can be used for unamplified and amplified designs to transmit up to 320 Gigabit over the same pair of SMF.

The Cisco Dense Wave Division Multiplexing (DWDM) GBICs allow users to integrate WDM transport directly with Cisco Gigabit Ethernet switches and routers. Just like DWDM XENPAK, the DWDM GBICs interoperate with the same ONS equipment. They can be used for unamplified and amplified designs to transmit up to 32 Gigabit over the same pair of SMF.

General Overview

OPTICS	CABLE TYPE							
Speed	Copper	MMF		SMF				
Fast Ethernet (FE)								
Optics Type		100BASE-FX		100BASE-LX		100BASE-BX-D/U		
Max. Distance		2 km		10 km		10 km		
Form Factor		SFP		SFP		SFP		
Gigabit Ethernet (GE)								
Optics Type	1000BASE-T	1000BASE-SX		1000BASE-LX		1000BASE-BX-D/U	1000BASE-ZX	1000BASE-CWDM
Max. Distance	100 m	550 m		10 km		10 km	~70 km	~70 to 100 km
Form Factor	SFP/GBIC	SFP/GBIC		SFP/GBIC		SFP	SFP/GBIC	SFP/GBIC
10 Gigabit Ethernet (10 GbE)								
Optics Type	10GBASE-CX4	10GBASE-SR	10GBASE-LX4	10GBASE-LR		10GBASE-ER	10GBASE-ZR	10GBASE-DWDM
Max. Distance	15 m	26 to 300 m	300 m	10 km		40 km	~80 km	~80 km
Form Factor	XENPAK/X2	XENPAK/X2	XENPAK/X2	XENPAK/X2		XENPAK	XENPAK	XENPAK

		MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
Model	Description	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
Fast Ethernet (FE)										
GLC-GE-100FX=	100BASE-FX SFP for GbE port				▪	▪	▪			▪
GLC-FE-100FX	100BASE-FX SFP for FE port	▪	▪				▪			▪
GLC-FE-100LX	100BASE-LX SFP for FE port	▪	▪				▪			▪
GLC-FE-100BX-U	100BASE-BX10-U SFP for FE port	▪	▪				▪			▪
GLC-FE-100BX-D	100BASE-BX10-D SFP for FE port	▪	▪				▪			▪
Gigabit Ethernet (GbE)										
GLC-LH-SM	1000BASE-LX/LH SFP (no DOM)	▪	▪	▪	▪	▪	▪		▪	▪
GLC-SX-MM	1000BASE-SX SFP (no DOM)	▪	▪	▪	▪	▪	▪		▪	▪
GLC-ZX-SM	1000BASE-ZX SFP (no DOM)	▪	▪	▪	▪	▪	▪			
GLC-T	1000BASE-T SFP	▪	▪	▪	▪	▪				
GLC-BX-D=	1000BASE-BX-D SFP (DOM)	▪	▪	▪	▪	▪	▪			
GLC-BX-U=	1000BASE-BX-U SFP (DOM)	▪	▪	▪	▪	▪	▪			
WS-G5483	1000BASE-T GBIC	▪	▪					▪		
WS-G5484	1000BASE-SX GBIC	▪	▪					▪		
WS-G5486	1000BASE-LX/LH GBIC	▪	▪					▪		
WS-G5487	1000BASE-ZX GBIC	▪	▪					▪		
CWDM-SFP-1470=	CWDM 1470 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1490=	CWDM 1490 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1510=	CWDM 1510 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1530=	CWDM 1530 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1550=	CWDM 1550 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1570=	CWDM 1570 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1590=	CWDM 1590 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-SFP-1610=	CWDM 1610 nm SFP GbE and 1G/2G FC	▪	▪	▪	▪	▪	▪			
CWDM-GBIC-1470=	1000BASE-CWDM 1470 nm GBIC	▪	▪					▪		
CWDM-GBIC-1490=	1000BASE-CWDM 1490 nm GBIC	▪	▪					▪		
CWDM-GBIC-1510=	1000BASE-CWDM 1510 nm GBIC	▪	▪					▪		
CWDM-GBIC-1530=	1000BASE-CWDM 1530 nm GBIC	▪	▪					▪		
CWDM-GBIC-1550=	1000BASE-CWDM 1550 nm GBIC	▪	▪					▪		
CWDM-GBIC-1570=	1000BASE-CWDM 1570 nm GBIC	▪	▪					▪		
CWDM-GBIC-1590=	1000BASE-CWDM 1590 nm GBIC	▪	▪					▪		
CWDM-GBIC-1610=	1000BASE-CWDM 1610 nm GBIC	▪	▪					▪		

		MODULAR SWITCHES		FIXED-CONFIGURATION SWITCHES						
Model	Description	Catalyst 6500	Catalyst 4500	Catalyst 4900	Catalyst 3750	Catalyst 3560	Catalyst 2960	Catalyst 2950	Catalyst 2940	Catalyst Express 500
Gigabit Ethernet (GbE) <i>continued</i>										
CWDM-OADM1-1470=	Dual Single Channel OADM Module (1470 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1490=	Dual Single Channel OADM Module (1490 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1510=	Dual Single Channel OADM Module (1510 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1530=	Dual Single Channel OADM Module (1530 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1550=	Dual Single Channel OADM Module (1550 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1570=	Dual Single Channel OADM Module (1570 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1590=	Dual Single Channel OADM Module (1590 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM1-1610=	Dual Single Channel OADM Module (1610 nm)	▪	▪	▪	▪	▪	▪	▪		
CWDM-MUX8A=	8-channel CWDM MUX/DMX Module	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM4-1=	4-channel CWDM OADM Module (1470, 1490, 1510, 1530)	▪	▪	▪	▪	▪	▪	▪		
CWDM-OADM4-2=	4-channel CWDM OADM Module (1550, 1570, 1590, 16100)	▪	▪	▪	▪	▪	▪	▪		
CWDM-MUX-4-SF1=	Single Fiber 4-Channel MUX/DMX	▪	▪	▪	▪	▪	▪	▪		
CWDM-MUX-4-SF2=	Single Fiber 4-Channel MUX/DMX	▪	▪	▪	▪	▪	▪	▪		
WDM-1300-1550-S=	1300 nm/1550 nm WDM Splitter Cable	▪	▪	▪	▪	▪	▪	▪		
CWDM-CHASSIS-2=	2-slot Chassis for CWDM MUX Plug-in Modules	▪	▪	▪	▪	▪	▪	▪		
10 Gigabit Ethernet (10 GbE)										
XENPAK-10GB-CX4	10GBASE-CX4 XENPAK Module	▪								
XENPAK-10GB-SR	10GBASE-SR XENPAK Module	▪								
XENPAK-10GB-ER	10GBASE-ER XENPAK Module	▪			▪					
XENPAK-10GB-LX4	10GBASE-LX4 XENPAK Module	▪								
XENPAK-10GB-LR	10GBASE-LR XENPAK Module	▪								
XENPAK-10GB-ZR	10GBASE-ZR XENPAK Module	▪								
C3-XENPAK10GB-LR	10GBASE-LR XENPAK Module for Catalyst 3750				▪					
X2-10GB-CX4	10GBASE-CX4 X2 Module		▪	▪						
X2-10GB-SR	10GBASE-SR X2 Module		▪	▪						
X2-10GB-LR	10GBASE-LR X2 Module		▪	▪						
X2-10GB-LX4	10GBASE-LX4 X2 Module		▪	▪						
DWDM-XENPAK-xx.xx=	10GBASE-DWDM XENPAK xx.xx wavelength (see datasheet)	▪								
WDM-XENPAK-REC=	Receive-only WDM XENPAK	▪								

Notes

Notes

Notes